


- 注意:
1. 塑胶开口朝尾巴方向 (防水) 折弯后, 面向折弯方向
 2. 散装: 200pcs/包

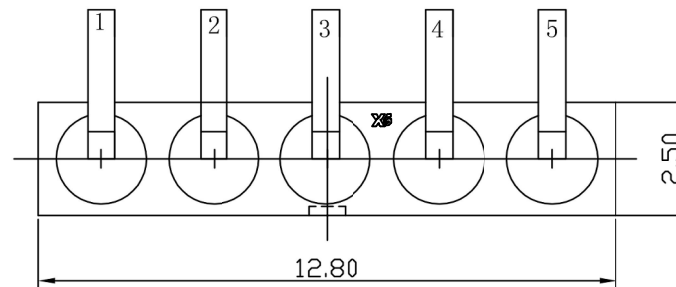

- NOTE
1. Material
cj: Brass 3602
housing: PA46
 2. Plating
cj: Au 3u" over 50~120u" Ni
 3. Electrical
Rated current & voltage: DC 12V; 1.0A Max
 4. To ensure the best usage, please operate it based on the working height
Based on the engineering drawings, shall not exceed the maximum allowed compression
 5. To avoid arcing issue, The adaptor start to power supply after connector mated fully.
 6. RoHS compliant product.

REV. A	Product Name: 5PIN 母座连接器	GENERAL TOLERANCE		SCALE: 15:1		制图 高鹏	DATE 2024-06-13	DRAWING NO: XB-PGC-W-254D-5P-M
SHEET 1/1		XX. ±0.40		UNIT: mm		批准 贺龙飞	DATE	
		.X ±0.10	.X° ±1.0°	SIZE: A4		审核 庞东	DATE	Material number:
		.XX ±0.05	.XX° ±0.5°					

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.