
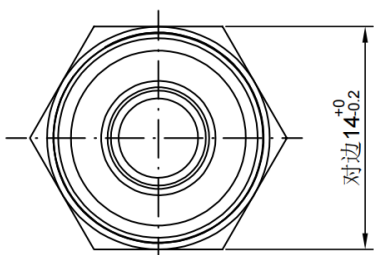
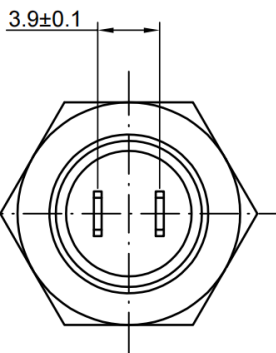


电器原理图

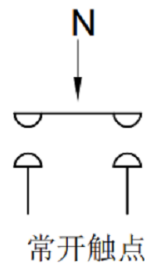

- 技术要求**
- 1、表面清洁，光泽均匀；
 - 2、标识清晰，无错位、重印；
 - 3、额定电压：0.5A/DC36V 1A/ AC220V；
 - 4、工作环境温度：-20°C+55°C；
 - 5、动作形式：自锁式/自复式；
 - 6、动作行程：2.2mm；
 - 7、动作力：≤5N；
 - 8、连接形式：焊接导线；
 - 9、拧紧力矩：5-10N.m；
 - 10、开关组合：1NO；
 - 11、外观材料：按键：PBT；
外壳：黄铜镀镍；
底座：尼龙；
插脚：黄铜镀金/黄铜镀银；
 - 12、未标注公差按照GB/T 1804-m级。

- 性能要求**
- 1、防水；
 - 2、接触电阻：≤50mΩ；
 - 3、绝缘电阻：≥1000MΩ；
 - 4、寿命：电器部分：在额定负载下动作5万次无异常；
机械部分：动作20万次无异常。
 - 5、插脚顶牛：40N，无松动、脱落现象。

W	白色
B	黑色
G	绿色
Y	黄色
R	红色
上盖颜色 X Cap color X	

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

					东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
					TITLE : PUHS SWITCH									
MODEL : XB-PBS-10F														
UNIT :	MM	DWN.	ZENQ. CHEN	DATE	TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 >10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE			
SCALE :	3 : 1	CHK'D	PENG. GAO	DATE			6	STEEL BALL	STEEL	1	NATURE			
VERSION	01	APPD.	FEI. LONG. HE	DATE			5	BOARD	PHENOLIC RESIN	1	NATURE			
										4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
										3	FRAME	IRON STRIP	1	Ni PLATED
										2	TERMINAL	BRASS STRIP	8	Ag PLATED
										1	KNOB	POM	1	BLACK
										NO.	PART NAME	MATERIAL	QTY.	FINISHING