

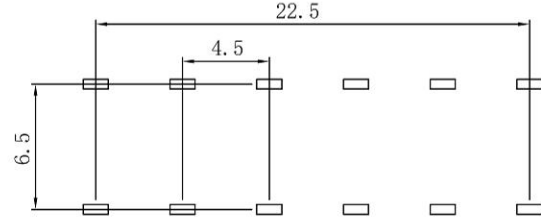




ROHS

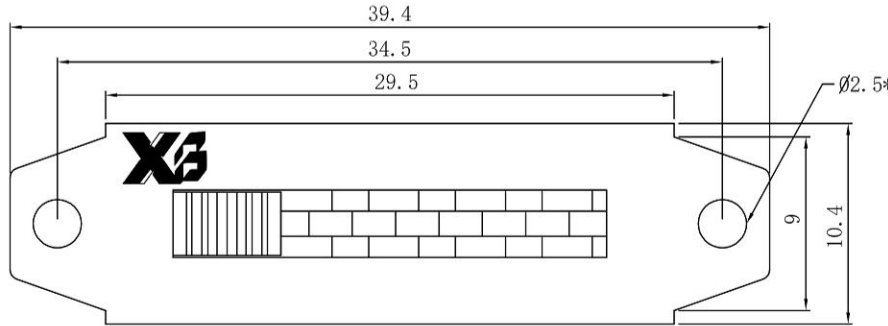

P.C.B LAYOUT

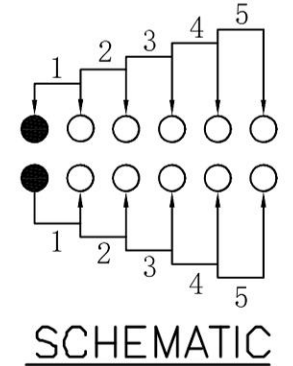

SCHEMATIC

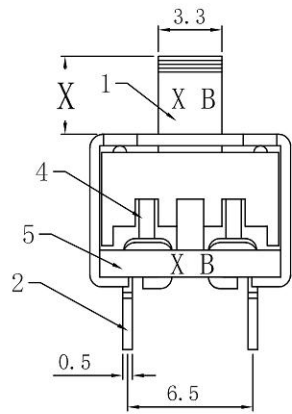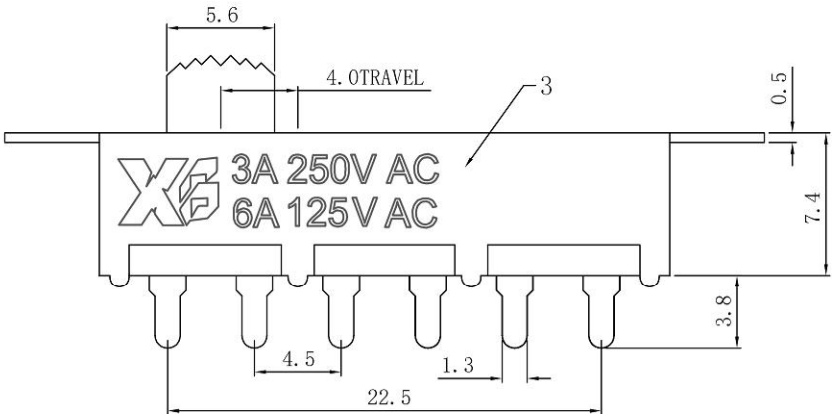



X2-12MM

SLIDE SWITCH 2P5T

SPECIFICATION (INITIAL)	
RATING:	3A 250V AC 6A 125V AC
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300±100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

7	钢珠	碳钢	1	原色
6	弹簧	碳钢线	5	原色
5	胶板	PA66	1	黑色
4	码片	黄铜带	2	镀银
3	铁壳	冷轧钢带	1	镀镍
2	端子脚	黄铜带	12	镀银
1	胶柄	PA66	1	黑色
NO.	物料组成	材质	数量	表面处理

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD									
	TITLE : XB SLIDE SWITCH									
MODEL : XB-SS-25H25X										
UNIT : MM	DWN.	ZENQ. CHEN	DATE	TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE			6	STEEL BALL	STEEL	1	NATURE
VBRSION	01	APPD.	FEI. LONG. HE			DATE	5	BOARD	PHENOLIC RESIN	1
						4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
						3	FRAME	IRON STRIP	1	Ni PLATED
						2	TERMINAL	BRASS STRIP	8	Ag PLATED
						1	KNOB	POM	1	BLACK
						NO.	PART NAME	MATERIAL	QTY.	FINISHING