

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A


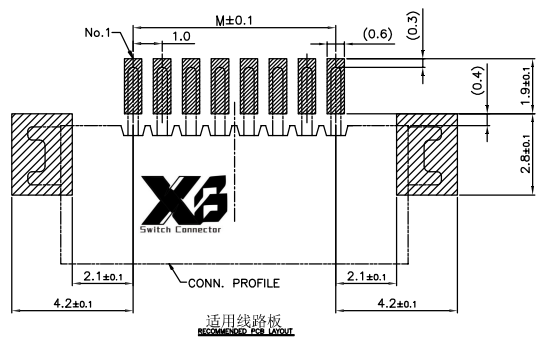
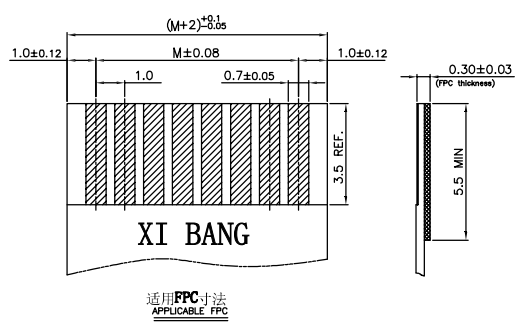




TABLE:

No. of Contacts	Dimension Information		
	M	L1	L
05	4.00	6.05	9.00
06	5.00	7.05	10.00
08	7.00	9.05	12.00
17	16.00	18.05	21.00
30	29.00	31.05	34.00



NOTES:

RATING  
 OPERATING TEMPERATURE: -25~85°C  
 OPERATING VOLTAGE: 125V AC/DC  
 CURRENT RATING: 0.5 AMPS  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 500V AC/Minute;  
 INSULATION RESISTANCE: 100MΩ Min;  
 CONTACT RESISTANCE: 0.03Ω Max;


MATERIAL;  
 CONTACT MATERIAL: PHOSPHOR BRONZE  
 FITTING NAIL: PHOSPHOR BRONZE  
 HOUSING MATERIAL: PA6T UL94V-0

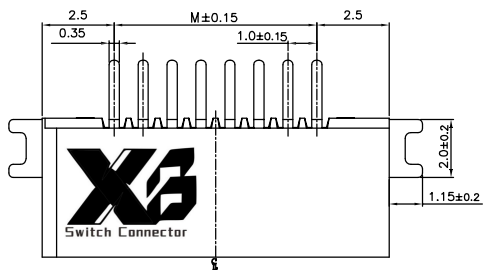

SECTION A-A

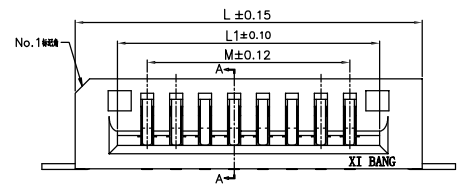

Ordering Information

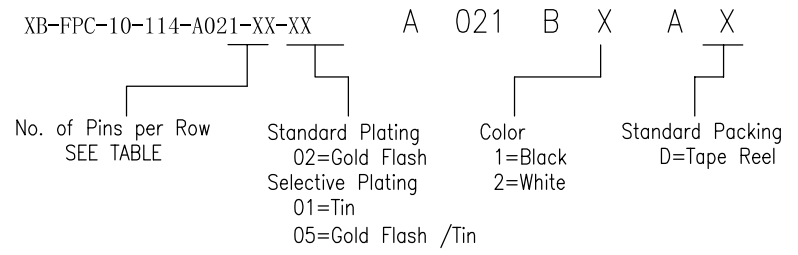

**XI BANG** 东莞市溪榜电子有限公司  
 DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. A UNIT. mm SCALE. 1:1

3RD. ANG PROJ.  
 PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0°	X.±/
.X'±3.0°	.X±0.25
.XX'±2.0°	.XX±0.20
.XXX'±1.0°	.XXX±0.10

DESIGNED:  
 CHECKED:  
 APPROVED:

DATE:  
 DATE:  
 DATE:

DWG. NO.  
 XB-FPC-10-114-A021  
 PART NO.

TITLE.  
 1.0 FPC CONN. NON ZIP SMT H=3.1 UPPER CONTACT

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A