
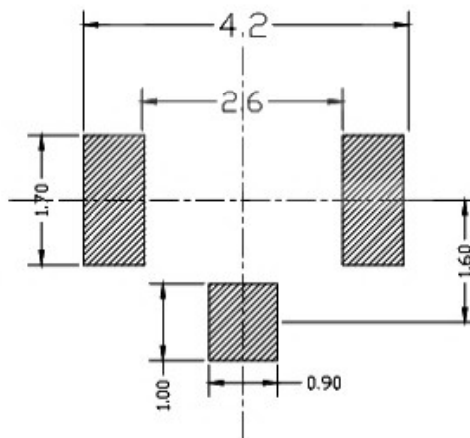

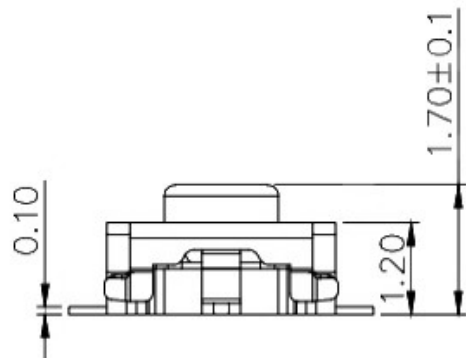


原理图



主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: 50mΩ
3. 操作力: 160gf±50gf
4. 行程: 0.13+0.05mm
5. 绝缘电阻: 100MΩ
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 1万Cycles

材料:

- A底座: LCP4009 (白色)
- B卡件: C5191磷铜 (镀银)
- C簧片: 不锈钢 (镀银)
- D内薄膜: 进口聚酰亚胺 (灰色)
- E桃心: PA46无卤 (灰色)
- F盖板: 不锈钢301 (清洗)

DONG GUAN XI BANG ELECTRONIC CO., LTD

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		Y,C,ZHANG		DWG.No.		SBICL	
PART NO.				CHECK		G.C.Chen		REV.		A1	
UNIT : mm		TOLERANCE OTHERWISE		UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE		±0.2 ±0.3 ±0.5 ±.7		ANGLE 0°±3'		APPROVAL	
						SCALE		2:1		PAGE	
								DATE		1 OF 1	