

3D VIEW




SPECIFICATION:

1. ELECTRICAL CHARACTERISTICS



- 1-1. CURRENT RATING: DC 1.0A MAX.
- 1-2. VOLTAGE RATING: DC 12V.
- 1-3. CONTACT RESISTANCE: 100mΩ MAX (INITIAL)  
100mΩ MAX (AFTER LIFE TEST)
- 1-4. INSULATION RESISTANCE: 1000Ω MIN. AT 500V DC.
- 1-5. WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS

- 2-1. LIFE TEST: 5000 CYCLES MIN.
- 2-2. MATING FORCE: 3~30N,  
UNMATING FORCE: 3~30N.

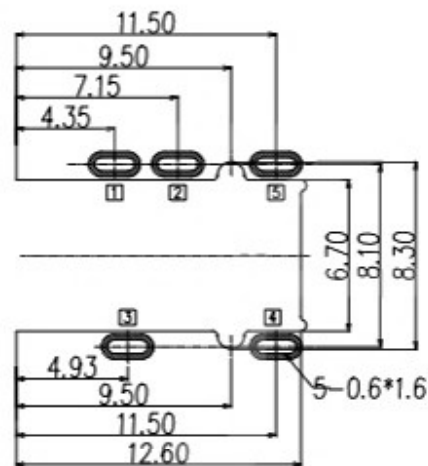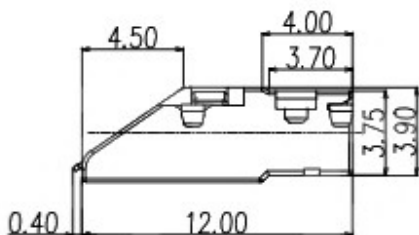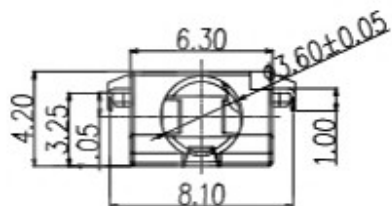

RECOMMENDED P.C.B LAYOUT  
TOP VIEW (TOLRANCE: ±0.05)

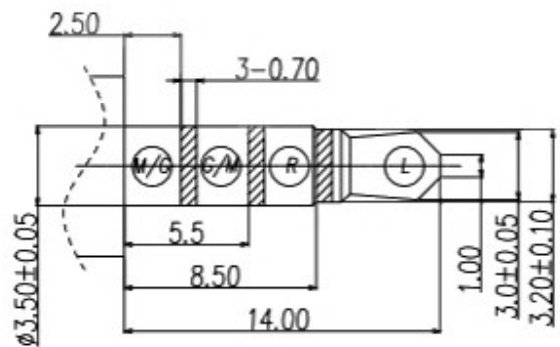

SCHEMATIC

5	HOUSING	1	HIGH TEMP PLASTIC,COLOR BLACK	——
4	TERMINAL 4	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA;GOLD PLATING ON CONTACT AREA.	——
3	TERMINAL 3	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA;GOLD PLATING ON CONTACT AREA.	——
2	TERMINAL 2	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA;GOLD PLATING ON CONTACT AREA.	——
1	TERMINAL 1	2	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA;GOLD PLATING ON CONTACT AREA.	——
ITEM	NAME	QTY	DESCRIPTION	NOTE

PART NAME		PHONE JACK		DRAWING		Y,C,ZHANG		DWG.No.		SBICL	
PART NO.		PJ-626		CHECK		G.C.Chen		REV.		A1	
UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	SCALE	2:1	DATE	PAGE	1 OF 1	
		ABOVE 5~30	±0.3								
mm		ABOVE 30	±0.5	0±5'							