


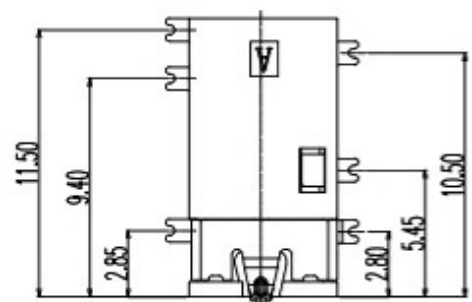




- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;





3D VIEW

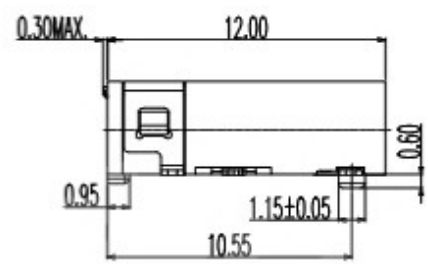

SCHEMATIC

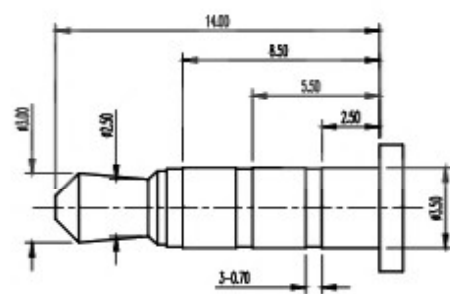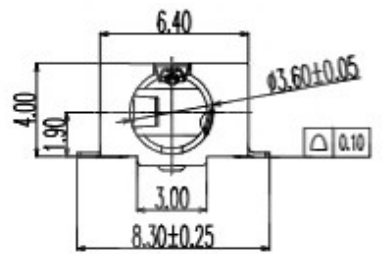

(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

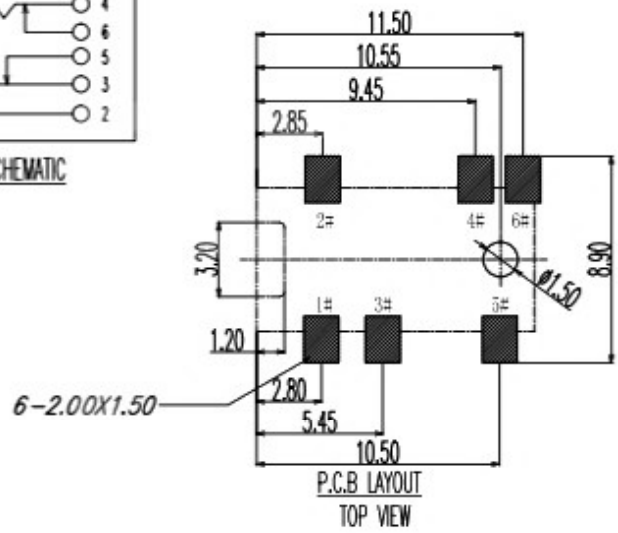

|      |             |     |  |      |
|------|-------------|-----|--|------|
| 7    | TERMINAL 6# | 1   |  |      |
| 6    | TERMINAL 5# | 1   | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA |      |
| 5    | TERMINAL 4# | 1   |  |      |
| 4    | TERMINAL 3# | 1   | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA |      |
| 3    | TERMINAL 2# | 1   |  |      |
| 2    | TERMINAL 1# | 1   | PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.                                       |      |
| 1    | HOUSING     | 1   | PPA COLOR BLACK  |      |
| ITEM | NAME        | QTY | DESCRIPTION  | NOTE |

|              |           |              |      |          |           |         |       |
|--------------|-----------|--------------|------|----------|-----------|---------|-------|
| PART NAME    |           | PHONE JACK   |      | DRAWING  | Y,C,ZHANG | DWG.No. | SBICL |
| PART NO.     |           | PJ-31360-I   |      | CHECK    | G.C.Chen  | REV.    | A1    |
| UNIT :<br>mm | TOLERANCE | UP TO 5      | ±0.2 | APPROVAL | SCALE     | DATE    | PAGE  |
|              | OTHERWISE | ABOVE 5 ~ 30 | ±0.3 |          |           | 1 OF 1  |       |
|              |           | ABOVE 30     | ±0.5 |          | 2:1       |         |       |
|              |           | ANGLE        | ±3°  |          |           |         |       |