



RECOMMENDED P.C.B LAYOUT

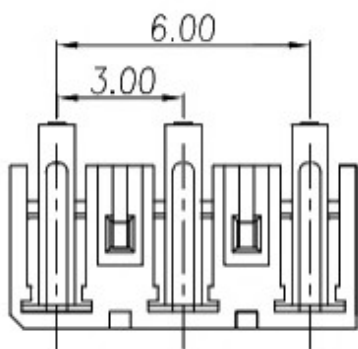

1. MATERIAL :
 - 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT A : BERYLLIUM BRONZE
 - 1-3. GROUND : PHOSPHOR BRONZE
2. FINISH :
 - 2-1. CONTACT A : 30 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. GROUND : BIRGHT TIN 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 1.5A
 - 3-2. Voltage :125V
4. Environmental :
 - 4-1. Operation Temperature : -40℃~105℃

PART NAME		CONNECTOR			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.					CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL		DATE	05-9-2013
	mm		ABOVE 5 ~ 30	±0.3			ANGLE	σ±3
			ABOVE 30	±0.5	SCALE	2:1		
			ANGLE	±3				