

F

E

D

C

B

A

RoHS  
Compliant

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

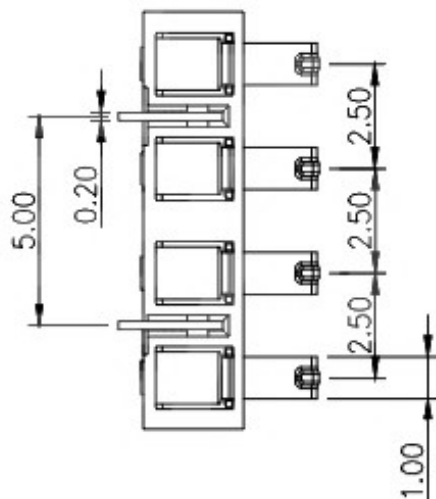
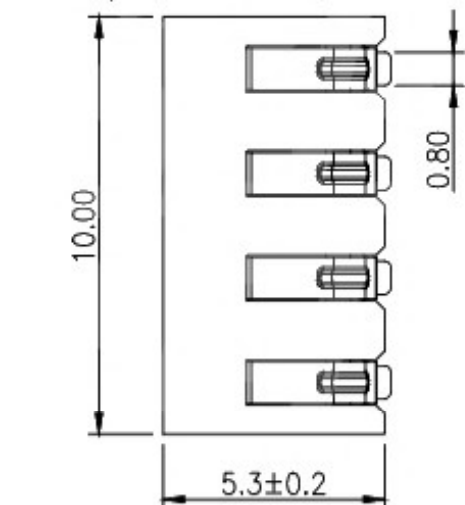
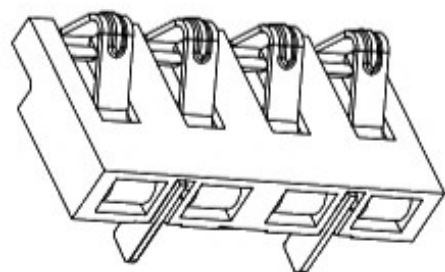
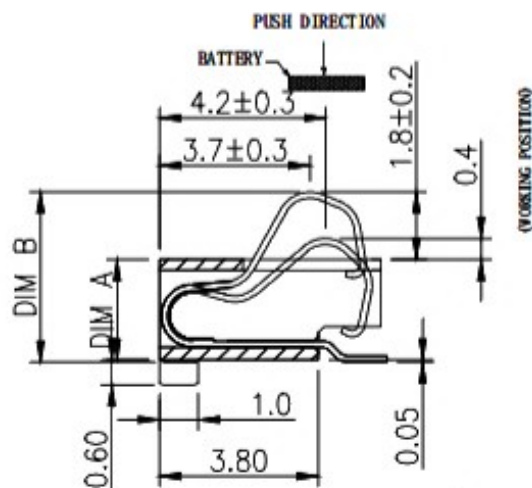
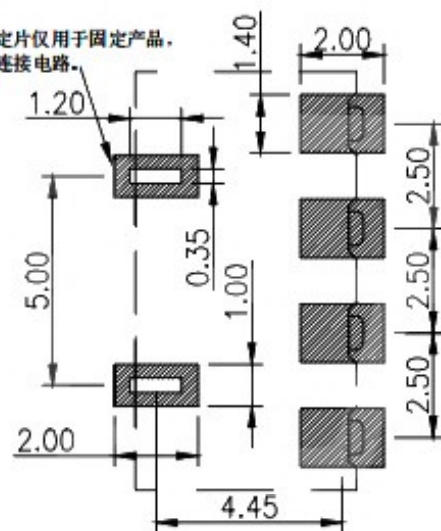
接触电阻: 30mΩ 以内

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP 黑色

接触点(材质): 铜合金, 触点镀金3U"

此固定片仅用于固定产品，  
请勿连接电路。

RECOMMENDED PCB LAYOUT

TOP VIEW(. XX±0.05)

PART NO.	DIM A	DIM B
BC4P25H24F-C06	2.4	4.20±0.2
BC4P25H30F-C06	3.0	4.80±0.2
BC4P25H35F-C06	3.5	5.30±0.2



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ±0.2	ABOVE 5 ~30 ±0.3	ANGLE	APPROVAL	DATE	
		ABOVE 30 ±0.5	ANGLE ±3'	SCALE	2:1	PAGE	1 OF 1

F

E

D

C

B

A