


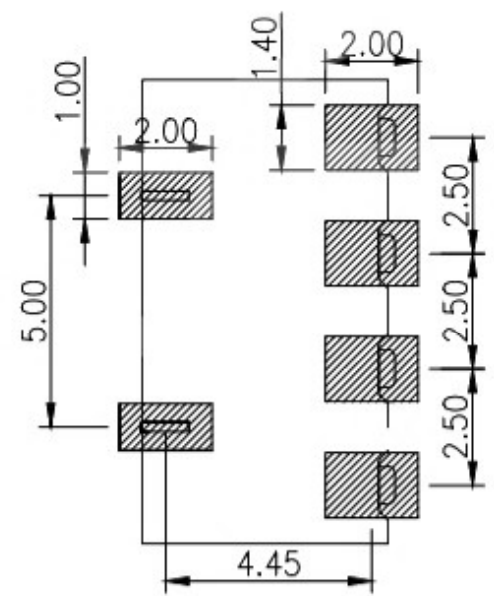


PART NO.	DIM A	DIM B
BC4P25H42	2.4	4.2±0.25
BC4P25H48	3.0	4.8±0.25
BC4P25H52	3.5	5.2±0.25

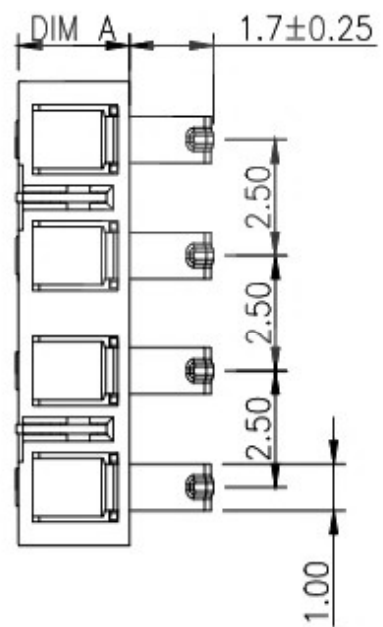

性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金

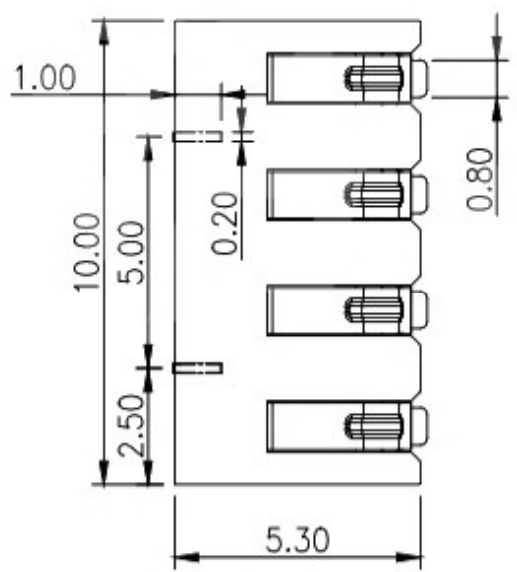

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL		DATE	14-03-2013
		ABOVE 5 ~ 30	±0.3			PAGE	1 OF 1
		ABOVE 30	±0.5	SCALE	2:1		
		ANGLE	±5°				