
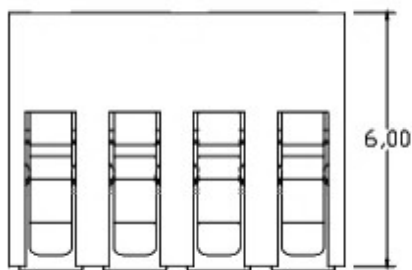
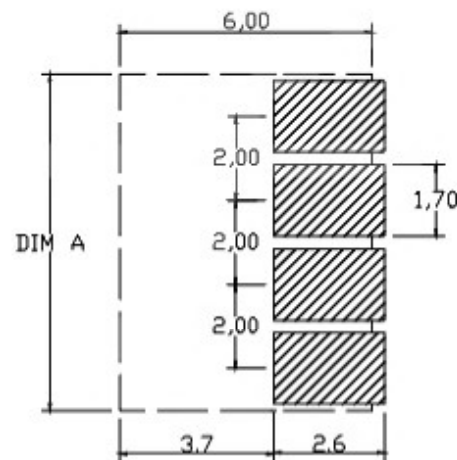
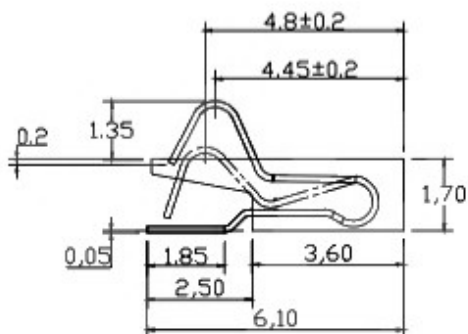


性能:


额定电流: 2.0A  
 额定电压: 12V  
 耐电压: 500V  
 接触电阻: 30mΩ  
 绝缘电阻: 500MΩ  
 工作温度: -40℃~+85℃  
 塑件(材质): LCP  
 接触点(材质): 磷铜, 触点镀金3U",  
 使用寿命: 5000次以上

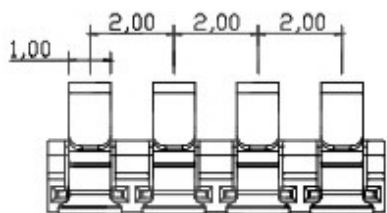

Pin数	PART NO.	DIM A
2Pin	BC2P20H31	4.0
3Pin	BC3P20H31	6.0
4Pin	BC4P20H31	8.0
5Pin	BC5P20H31	10.0
6Pin	BC6P20H31	12.0
7Pin	BC7P20H31	14.0
8Pin	BC8P20H31	16.0

RECOMMENDED PCB LAYOUT

TOP VIEW (. XX±0.05)

PART NAME		CONNECTOR			DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.					CHECK	G.C.Chen	REV.	A1
 UNIT : mm	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	12-01-2014	
	OTHERWISE	ABOVE 5~30	±0.3					±3°
		SCALE	2:1	PAGE		1 OF 1		