
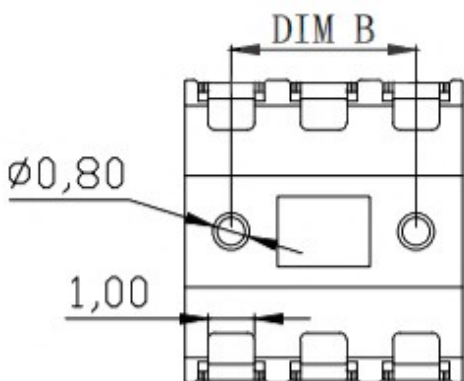
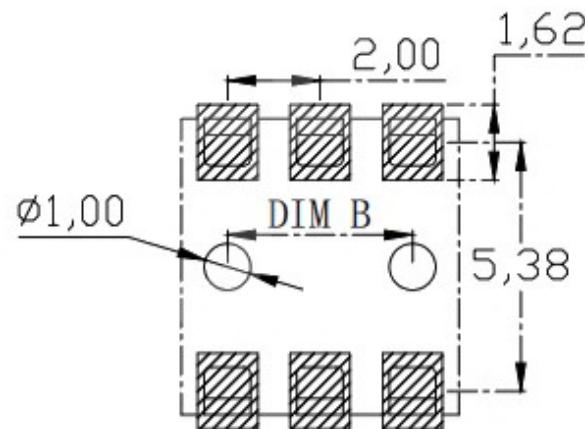
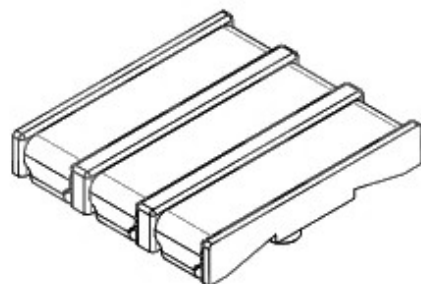


性能:

额定电流: 5.0A
 额定电压: 30V
 耐电压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 500MΩ
 工作温度: -55℃~+125℃
 使用寿命: 10000次以上
 塑件(材质): PA9T黑色
 接触点(材质): 黄铜C2680, 镀金

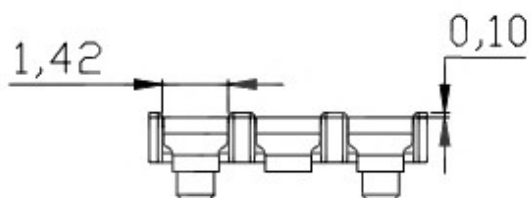

规格	DIM A	DIM B
BM2P20H127	4.0	
BM3P20H127	6.0	4.0
BM4P20H127	8.0	6.0
BM5P20H127	10.0	8.0
BM6P20H127	12.0	10.0
BM7P20H127	14.0	12.0
BM8P20H127	16.0	14.0

RECOMMENDED PCB LAYOUT

TOP VIEW(. XX±0.05)

PART NAME		CONNECTOR		DRAWING		Y.C.ZHANG		DWG.No.		SBICL	
PART NO.				CHECK		G.C.Chen		REV.		A1	
UNIT :	mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	11-04-2018	PAGE	1 OF 1
			ABOVE 5~30	±0.3							
			ABOVE 30	±0.5		SCALE	2:1				
			ANGLE	±.7							