


RECOMMENDED PCB LAYOUT  
TOL:(<math>\pm 0.05</math>)

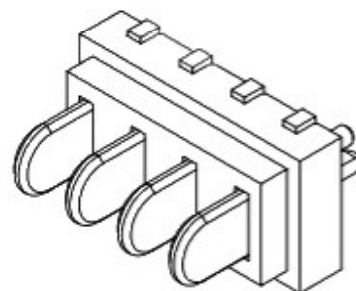

NOTES:

1.Material:

Housing:LCP UL 94V-0,Block

Terminal:Copper Alloy

2.Finish:Plating Gold

3.Specification

Rated Voltage(Max.):30V AC/DC

Dielectric Strength:1KV AC For 1 Minute

Between Adjacent Terminal,No Breakdown

Insulation Resistance:1000 Megohms Min. 500V

DC For 1 Minute Between Adjacent Terminal

Operating Temperature:-20°C-80°C

4.Order information:

BC10P20H0ST	20.50	18.00	19.90
BC9P20H0ST	18.50	16.00	17.90
BC8P20H0ST	16.50	14.00	15.90
BC7P20H0ST	14.50	12.00	13.90
BC6P20H0ST	12.50	10.00	11.90
BC5P20H0ST	10.50	8.00	9.90
BC4P20H0ST	8.50	6.00	7.90
BC3P20H0ST	6.50	4.00	5.90
BC2P20H0ST	4.50	2.00	3.90
Be filled	DIMA	DJMB	DIMC



东莞市溪榜电子有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.					CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	
	OTHERWISE	ABOVE 5~30	±0.3		SCALE	2:1	PAGE	1 OF 1