



不锈钢双护套



钢壳单护套

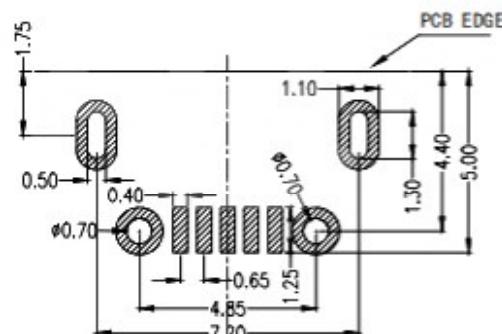

PCB图仅供参考

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.30mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X XX-263
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- 外壳材质 1:CS80P-H 7:SU8304R-1/2H
- 外壳电镀 1:160u'' 2:雾150u'' 3:10Au''(脚) 4:Au''
- 端子电镀 01:Au'';02:Au'';03:Au'' 05:Au'';10:Au'';15:Au'';30:Au''
- 主体颜色 8:黑色
- 主体材质 1:LCP
- 端子材质 4:0519IR-EH



COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR	DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.	MIRCO USB 5S B TYPE 四脚全插(牛角型)设计脚长1.2mm	CHECK	G.C.Chen	REV.	A1
UNIT :	TOLERANCE UP TO 5 ±0.2 ABOVE 5~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3	APPROVAL		DATE	
mm	OTHERWISE	SCALE	2:1	PAGE	1 OF 1