
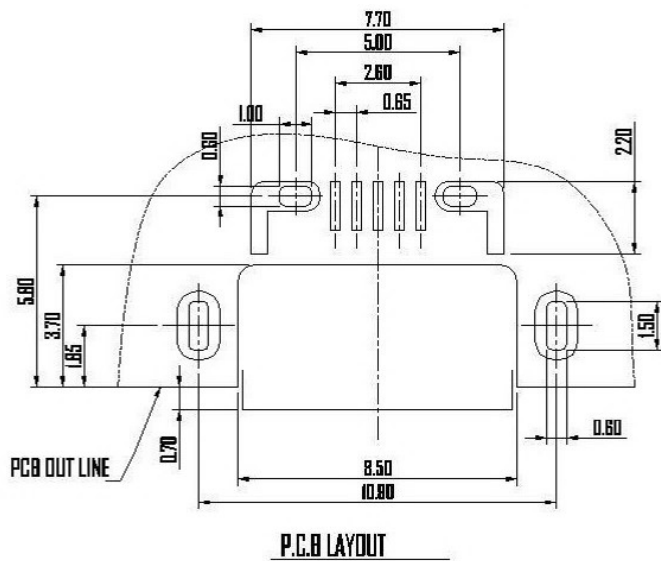
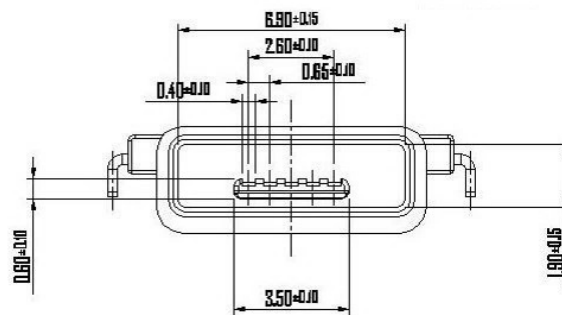


REV.	ECN. NO.	APPD.

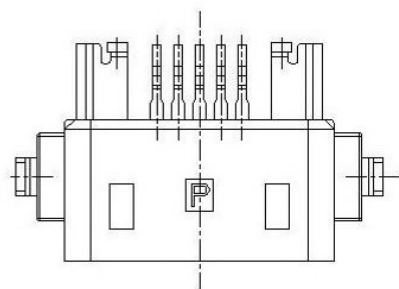

NOTES:  
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

X. ±0.50	X.* ±2*	<b>东莞市溪榜电子有限公司</b>	PART NO.	TITLE: IP68						
.X ±0.30	.X* ±1*									
.XX ±0.10	.XX* ±0.5*									
.XXX ±0.05		MAT'L	APPD: RADDM	DWG NO: <b>USB MICROIPX7</b>						
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD</small>		FINISH			CHKD: MARK					
		Q'TY			DR: JANE CHOU 2019/07/11					
				<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/2</td> <td>A2</td> </tr> </table>	SCALE	SHEET	REV.	1/1	1/2	A2
SCALE	SHEET	REV.								
1/1	1/2	A2								