
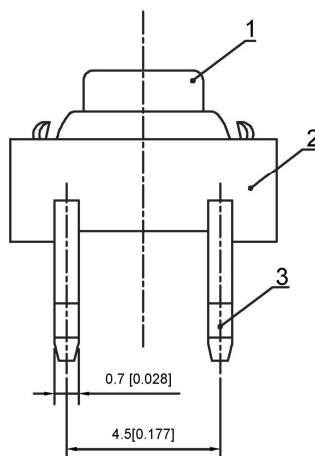


SCHEMATIC

P.C.B LAYOUT

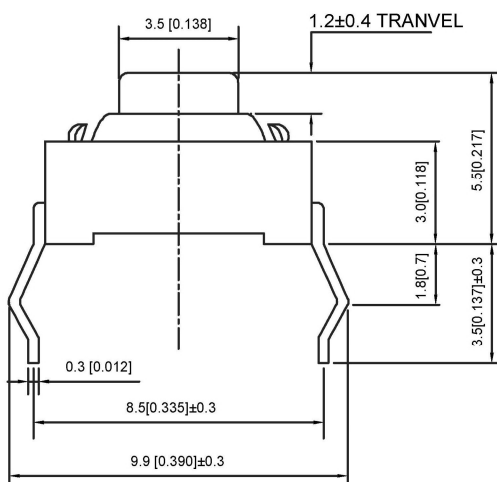

SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 1.2mm
 Operating Temp: -30°C~+85°C
 Storage Temp: -30°C~+80°C

PAPT NO	TC-1117-X
Operating Force	B:120gf
Height	H:5.5

ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK
③	Terminal	4	Brass (0.30t)	Plating silvering		
②	Base	1	Pa46			
①	Keystake	1	Silica gel			

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					
ΔX					
ΔX					

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO
APPD		DATE		SIZE: A4	TC-1117-X
				DONG GUAN XI BANG ELECTRONIC CO., LTD	WEIGHT 1.0g
					SHEET 1/1
					REVISION A0