




SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.15mm
 Operating Temp: -30℃~+85℃
 Storage Temp: -30℃~+80℃

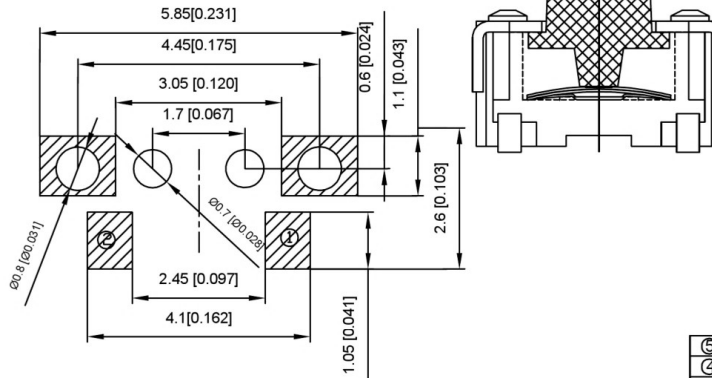

Circuit Diagram

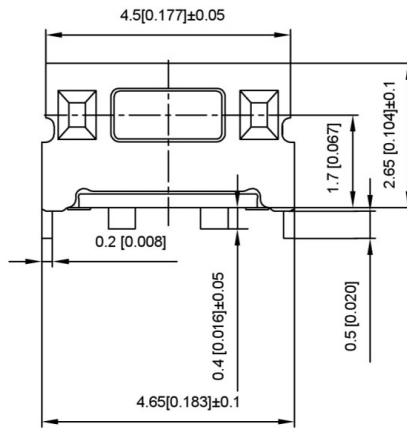

PAPT NO	TS-1010B-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:3.5
Position Foot	A:With B:without

ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK
5	Terminal	2	2	Brass (0.30t)	Plating silvering	
4	Contact	1	1	F.ag/Sus	Natural	
3	Base	1	1	Lcp		
2	Cover	1	1	Brass	Plating Nickel	
1	Keystake	1	1	Pa46		

					units: mm	DSND	DATE	SCALE: N/A	MODEL TYPE: TACT SWITCH
					tolerance:	DWN	DATE	VIEW:	PART NO.:
ΔX					X.X ±0.2mm	CHKD	DATE	UNIT: mm/in	DWG NO
ΔX					X.XX ±0.1mm	APPD	DATE	SIZE: A4	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm	DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT 1.0g
REVISIONS					UNSPECIFIED TOLERANCES				SHEET 1/1
www.alpsr.com www.gdxjdz.com www.xbswitch.com									REVISION A0