


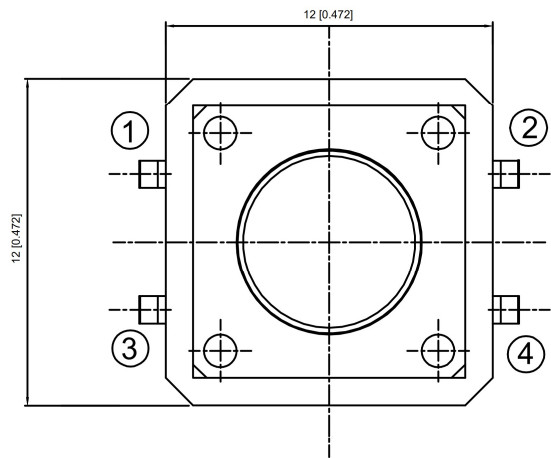
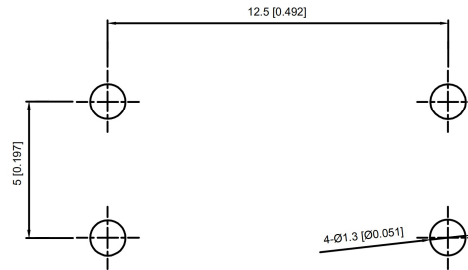




P.C.B Mounting
pattern Dimension

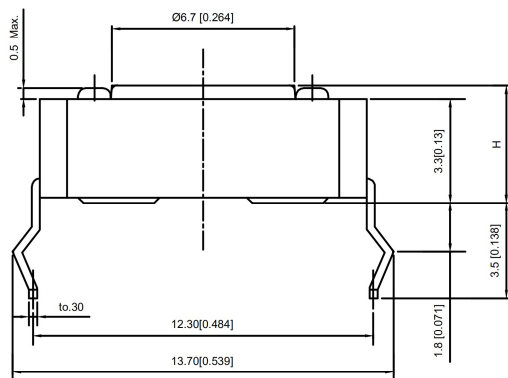

Circuit diagram



Code-x	H	Code-x	H
A	4.3	O	11.0
B	4.5	P	11.5
C	5.0	Q	12
D	5.5	R	12.5
E	6.0	S	13.0
F	6.5	T	13.5
G	7.0	U	14.0
H	7.5	V	15.0
I	8.0	W	16
J	8.5	X	17
K	9.0	Y	18
L	9.5	Z	19
M	10.0		
N	10.5		

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

PAPT NO	TC-1103-X-X
Operating Force	B:160gf C:260gf
Height	Code-X

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units:	mm	DWN		DATE		VIEW:	PART NO.:		
ΔX					tolerance:		CHKD		DATE		UNIT: mm/in	DWG NO.:		
ΔX					X.X	±0.2mm						TC-1103-X-X		
ΔX					X.XX	±0.1mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
REVISIONS							UNSPECIFIED TOLERANCES							
www.alpsr.com www.gdxdz.com www.xbswitch.com							DONG GUAN XI BANG ELECTRONIC CO., LTD					WEIGHT	SHEET	REVISION
												1.0g	1/1	A0