
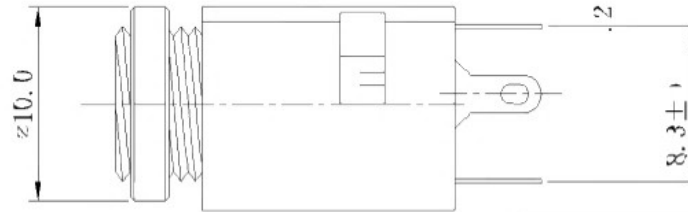



**SCHEMATIC**

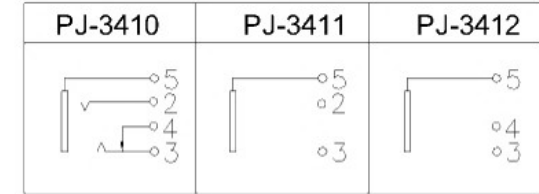

**SPECIFICATIONS:**  
 RATING: 12V DC @ 1A  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 50M OHMS MIN: 100V DC  
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
 LIFE: 5,000 CYCLES

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Brass	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°	DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
Δx					X.X	±0.2mm	DWN	DATE	VIEW:	PART NO.:		
Δx					X.XX	±0.1mm	CHKD	DATE	UNIT: mm	DWG NO.:		
Δx					X.XXX	±0.05mm	APPD	DATE	SIZE: A4			
REVISIONS					UNSPECIFIED TOLERANCES		东莞市溪榜电子有限公司			WEIGHT 1.0g	SHEET 1/1	REVISION A0