


### SCHEMATIC

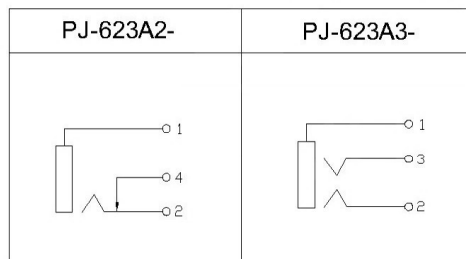

### SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 50\text{m}\Omega$ ;
3. Insulation resistance:  $> 100\text{M}\Omega$  (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles.

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PBT	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: 6.5 PHONE JACK
$\Delta X$					ANGULAR $\pm 5^\circ$	DWN	DATE	VIEW:	PART NO.:
$\Delta X$					$L \leq 4 \pm 0.2$	CHKD	DATE	UNIT: mm	DWG NO.:
$\Delta X$					$4 < L \leq 16 \pm 0.3$	APPD	DATE	SIZE: A4	
					$16 < L \leq 63 \pm 0.4$	东莞市溪榜电子有限公司			WEIGHT 1.0g
					$L > 63 \pm 0.5$				SHEET 1/1
REVISIONS									REVISION A0