
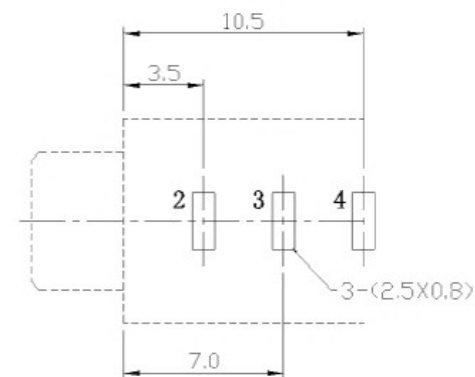



G:Gold plated
S:Silver plated

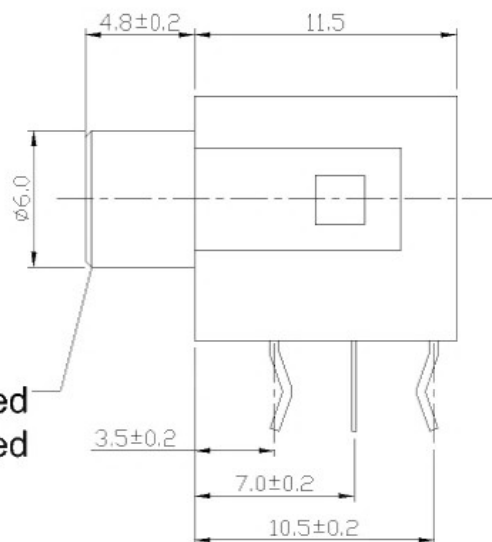

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 50m\Omega$;
3. Insulation resistance: $> 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles.

SCHEMATIC

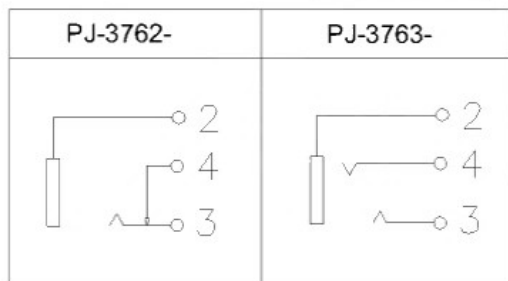

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Phosphor Bronze	tin
plastic	Pbt	

REVISIONS					UNSPECIFIED TOLERANCES		DSND	DATE	SCALE: N/A	MODEL TYPE:		
ΔX					ANGLAR	±5°	DWN	DATE	VIEW:	3.5 PHONE JACK		
ΔX					X.X	±0.2mm	CHKD	DATE	UNIT: mm	PART NO.:		
ΔX					X.XX	±0.1mm	APPD	DATE	SIZE: A4	DWG NO.:		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	±0.05mm				WEIGHT	SHEET	REVISION
										1.0g	1/1	A0