

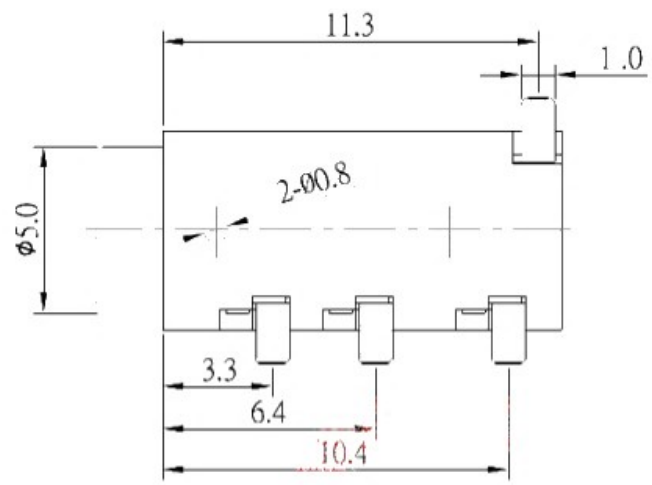


P.C.B LAYOUT
TOP VIEW

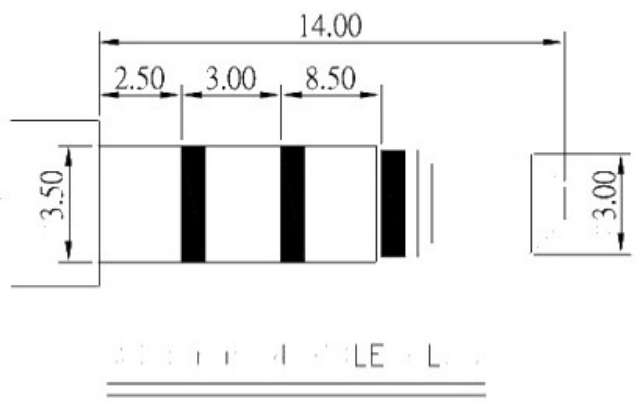

SPECIFICATIONS

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles ;

PJ-320D-X

R:red	G:green
Y:yellow	B:black
W:white	T:transparent

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PPA	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYFE.
△ X					units: mm	DWN	DATE	VIEW:	3.5 SMT PHONE JACK
△ X					tolerance:	CHKD	DATE	UNIT: mm	PART NO.:
△ X					X.X ±0.2mm	APPD	DATE	SIZE: A4	DWG NO.:
					X.XX ±0.1mm				
					X.XXX ±0.05mm				
REVISIONS									WEIGHT
									1.0g
									SHEET
									1/1
									REVISION
									A0