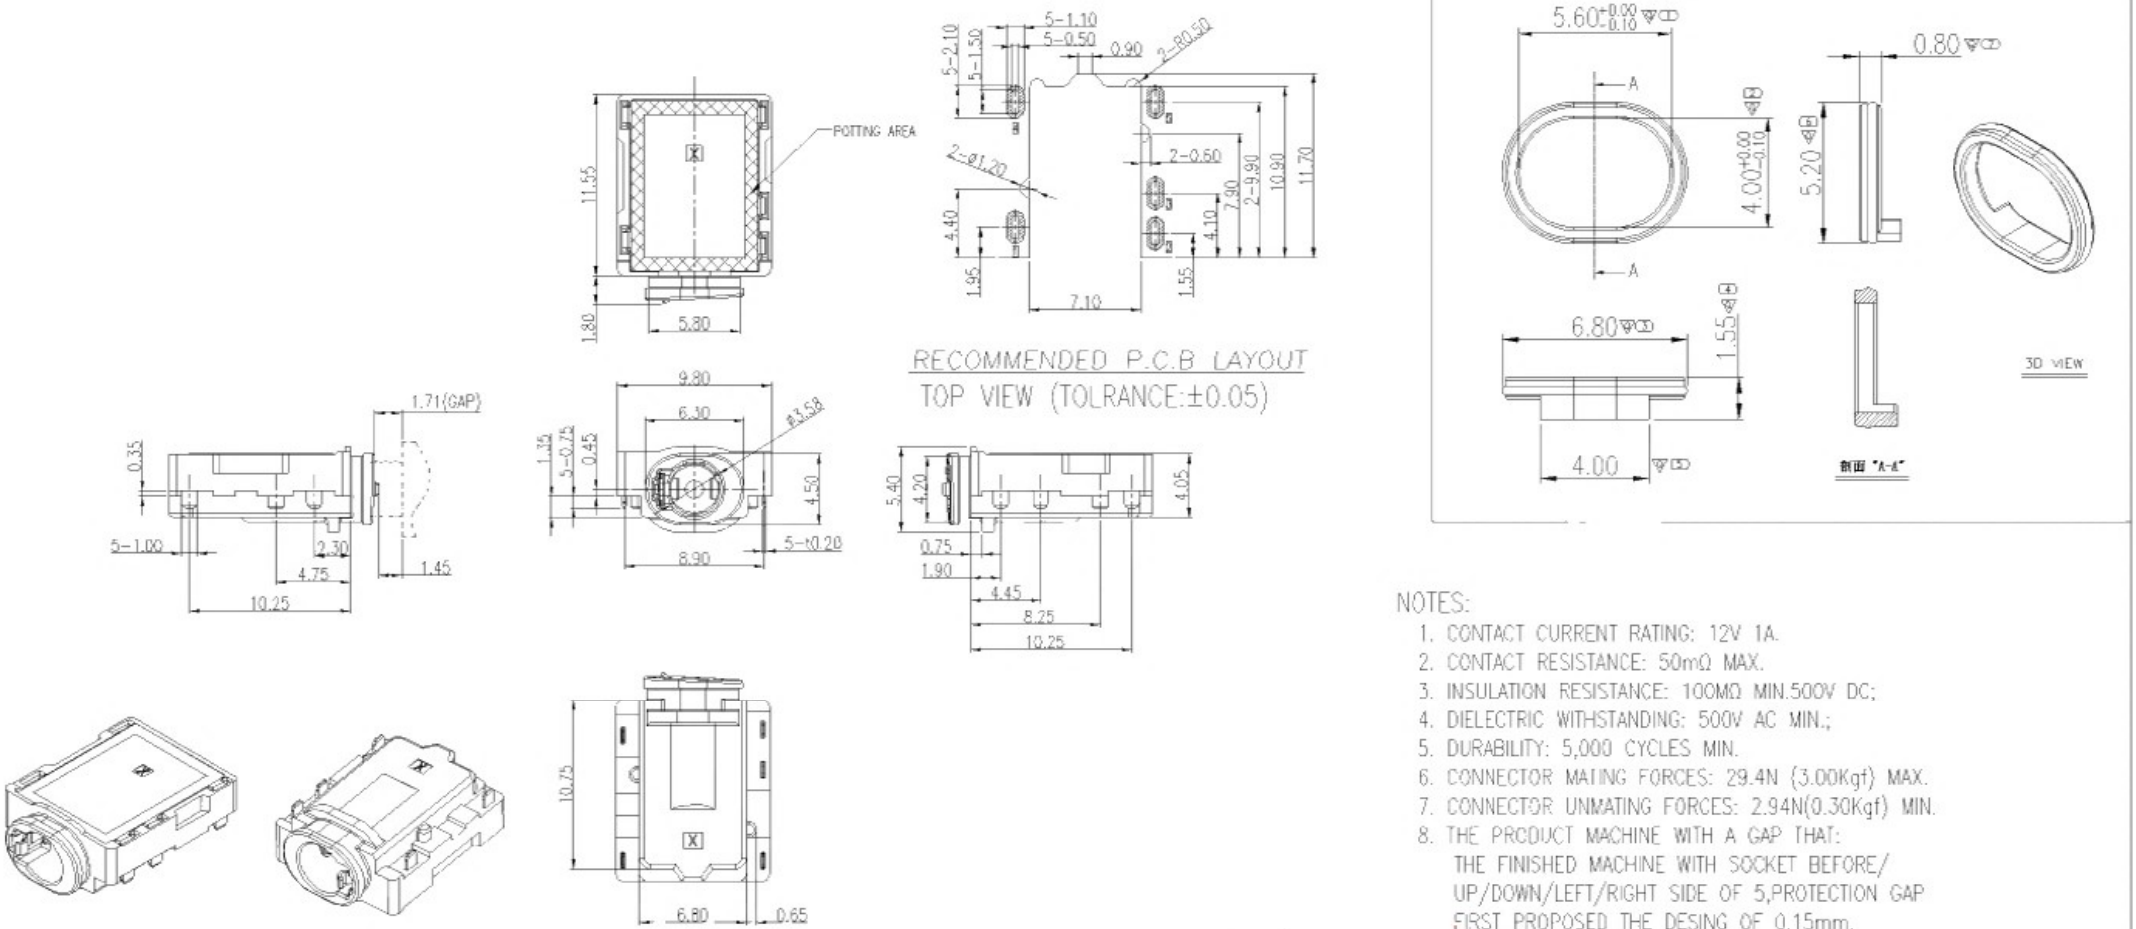

NOTES:

1. CONTACT CURRENT RATING: 12V 1A.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.500V DC;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.
8. THE PRODUCT MACHINE WITH A GAP THAT:
   THE FINISHED MACHINE WITH SOCKET BEFORE/
   UP/DOWN/LEFT/RIGHT SIDE OF 5,PROTECTION GAP
   FIRST PROPOSED THE DESING OF 0.15mm.

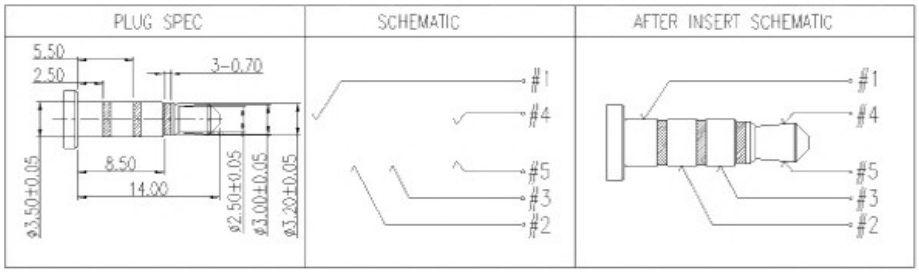

NO.	DESCRIPTION	MAT.L	COLOR	REMARK
8	GLUE WATER	EPOXY	BLACK	———
7	Cover	HIGH TEMP	BLACK	———
6	Housing	HIGH TEMP	BLACK	———
5	TERMINAL-5	COPPER ALLOY	———	Au PLATED
4	TERMINAL-4	COPPER ALLOY	———	Au PLATED
3	TERMINAL-3	COPPER ALLOY	———	Au PLATED
2	TERMINAL-2	COPPER ALLOY	———	Au PLATED
1	TERMINAL-1	COPPER ALLOY	———	Au PLATED

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
△X				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm
APPD		DATE		SIZE: A4

东莞市溪榜电子有限公司

MODEL TYPE: 3.5 PHONE JACK

PART NO.:

DWG NO.:

WEIGHT	SHEET	REVISION
1.0g	1/1	A0