




Typical Specifications

1. Rating : 5A120V AC
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 30,000 cycles

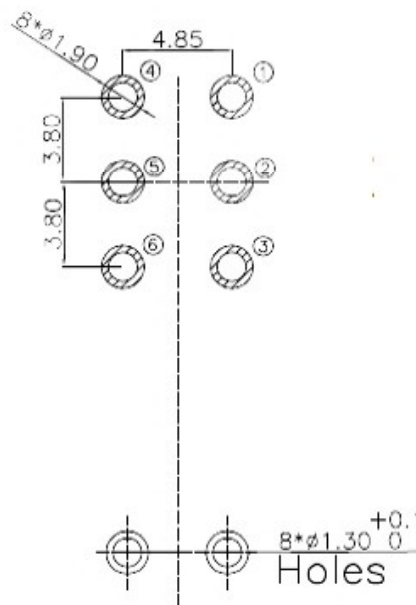

Circuit Diagram

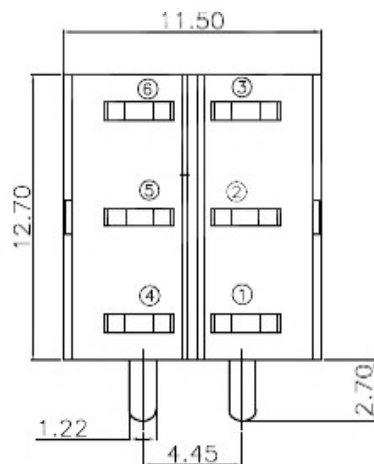

PCB Layout(pattern side)

PART NO	vigor
1	300±100

⑤	Terminal	—	6	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	RED	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

东莞市溪榜电子有限公司

CHECKED		TITLE:	Slide SWITCHS		
APPROVALS		PART NO.			
TOLERANCES ARE	30~10	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30	±0.20	±2'	DRAWING NO.	PROJ:
	5~10	±0.15			
	~ 5	±0.10			

ECN NO.	REV.	DATE.	NEW DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A					