



RECOMMEND P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



防水圈图示

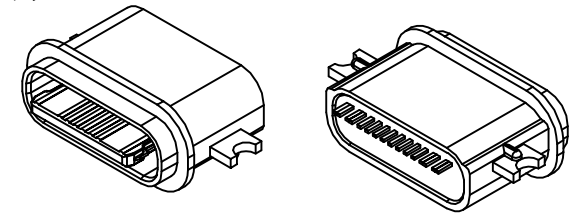

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0 A
- VOLTAGE RATING: 3.0 V
- VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
- INSULATION RESISTANCE: 100MΩ MIN
- DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1MIN
- INSERTION FORCE: 0.5~2.0kgf
- UNMATING FORCE: 0.8-2.0kgf
- DURABILITY: 10000 CYCLES
- OPERATING TEMPERATURE: -35°C~+85°C
- THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C
- WATERPROOF: IP-X7.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

东莞市溪榜电子有限公司
DONG GUAN XIBANG ELECTRONICS CO., LTD.

TOLERANCE: XXX ±0.30 X:XXX ±0.20 X:XXX ±0.10 X:XX ±0.05 X:XX ±0.02 X:XX ±0.01 X:XX ±0.005 X:XX ±0.002 X:XX ±0.001	DRAWN BY :	DATE :	PART NAME: TYPE-C16P防水沉板 0.8粉末冶金L6.5舌头外露0.95	
	CHECKED BY :	DATE :	PART NO.	SEE TABLE
	APPROVED BY :	DATE :	DRAW NO.	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4		2015.08.18		SHEET NO. 1 OF 1