受控文件

http://www.alpsr.com

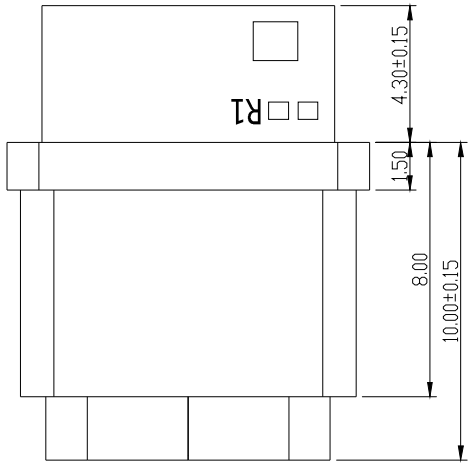

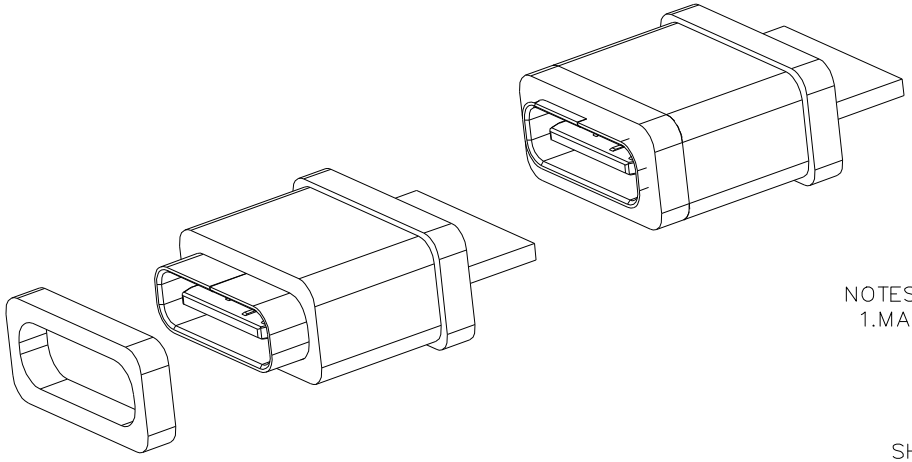

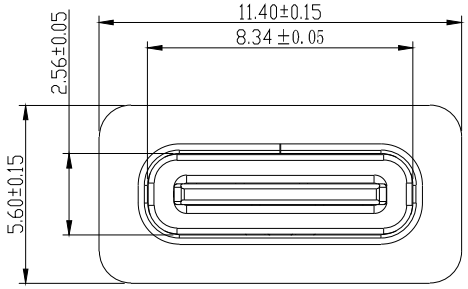

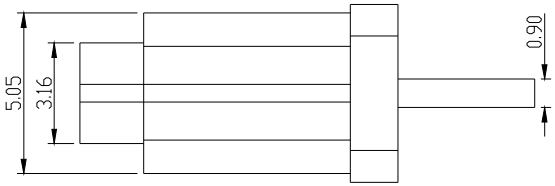

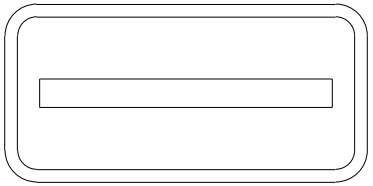

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

GOLD PLATED Min ON CONTACT AREA,100u"

Min TIN (LEAD FREE) ON SOLDER AREA,

SHELL: SUS304-H,T=0.30±0.03mm

50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N AFTER TEST.

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 3A FOR VBUS;

1.25A FOR GND PIN.

0.25A FOR OTHER.

VOLTAGE: 20 V MAX

WITHSTANDING VOLTAGE: 100V AC R.M.S.

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

密封圈

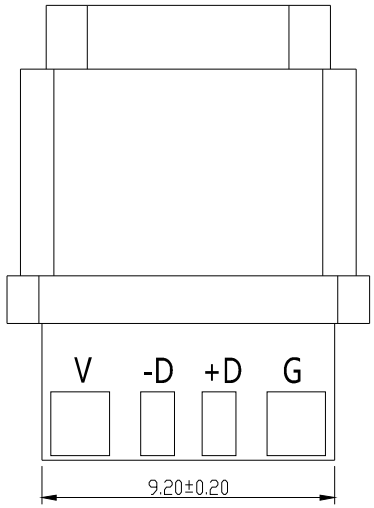

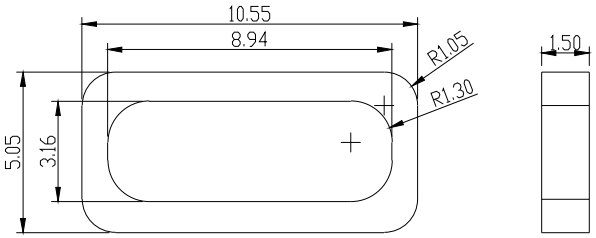

东莞市溪榜电子有限公司 DONG GUAN XIBANG ELECTRONICS CO., LTD.			
TOLERANCE: X.X ±0.30, X.XX ±0.20, X.XXX ±0.10, X.° ±10°, .X° ±8°, .X° ±5°; UNIT: mm [inch]	DRAWED BY :	DATE : 2015.08.18	PART NAME: TYPE-C16P防水焊线式带四个焊点H10.0
	CHECKED BY:	DATE : 2015.08.18	PART NO. SEE TABLE; MOLD NO.
	APPROVED BY:	DATE : 2015.08.18	DRAW NO:
SCALE:1:1	SIZE: A4		SHEET NO. 1 OF 1