




REVISION A RoHS

SYMB	REVISION	DATE	APVD.

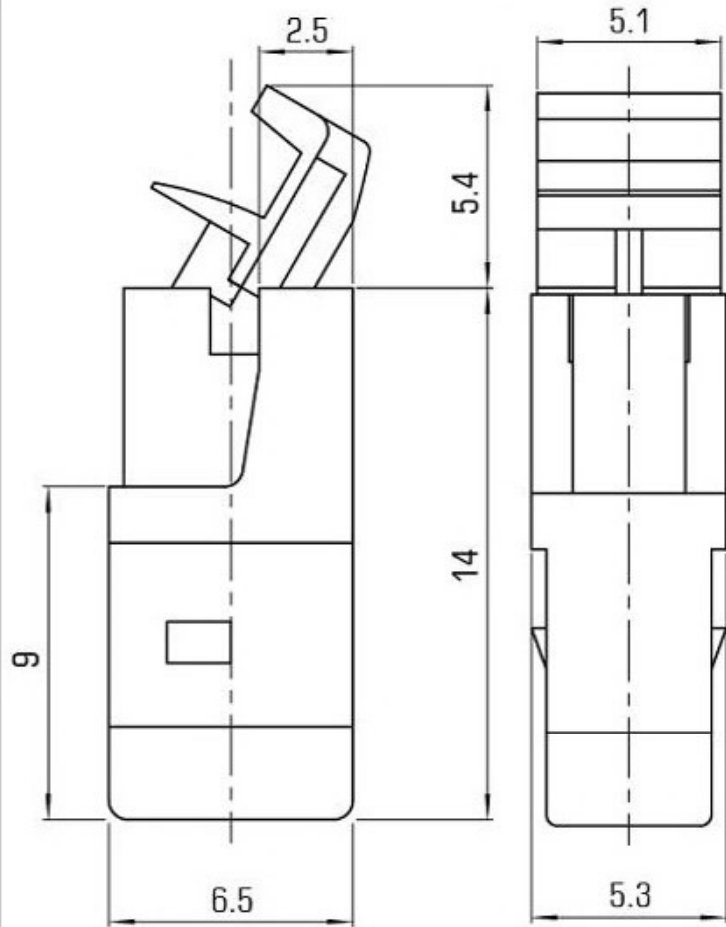



夾子欲下壓產生扣住功能時  
行程距離卡板頂端衝程  
3.0mm位?

Maximum Push-IN Position





夾子扣住時  
夾子頂端位置  
距離卡板頂端  
4.5mm

Close Position

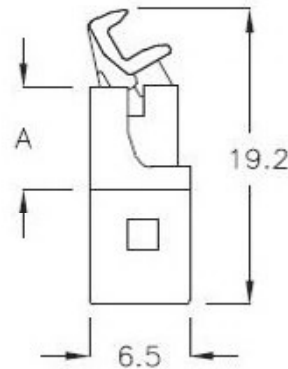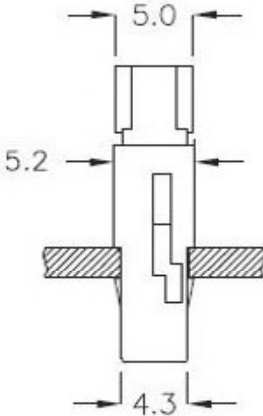

HOLE IN CHASSIS:

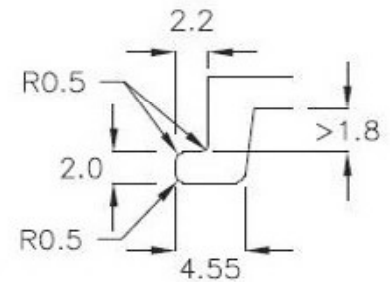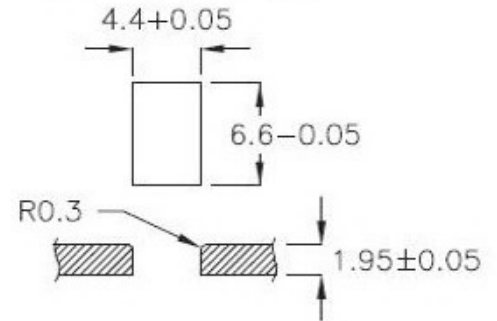

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8						
PART NO.		CHECKED		UP TO 5	±0.2	7					
DRAW NO.	DL1	APPROVED		ABOVE 5 ~ 30	±0.3	6					
SCALE: 2:1	UNIT: mm	DATE:		ABOVE 30 ~ 50	±0.4	5					
<p>東莞市溪榜電子有限公司 Dongguan Xi Bang Electronic Co., Ltd</p>				ABOVE 50	±0.5	4					
				ANGLE	±3'	3	SPRING	SUS	1	NI PLATED	
						2	HOUSING	POM	1	BLACK	
						1	SLIDER	PA12	1	BLACK	
							NO.	PARTS	MATERIAL	QTY.	FINISHING