




REVISION A RoHS

SYMB	REVISION	DATE	APVD.

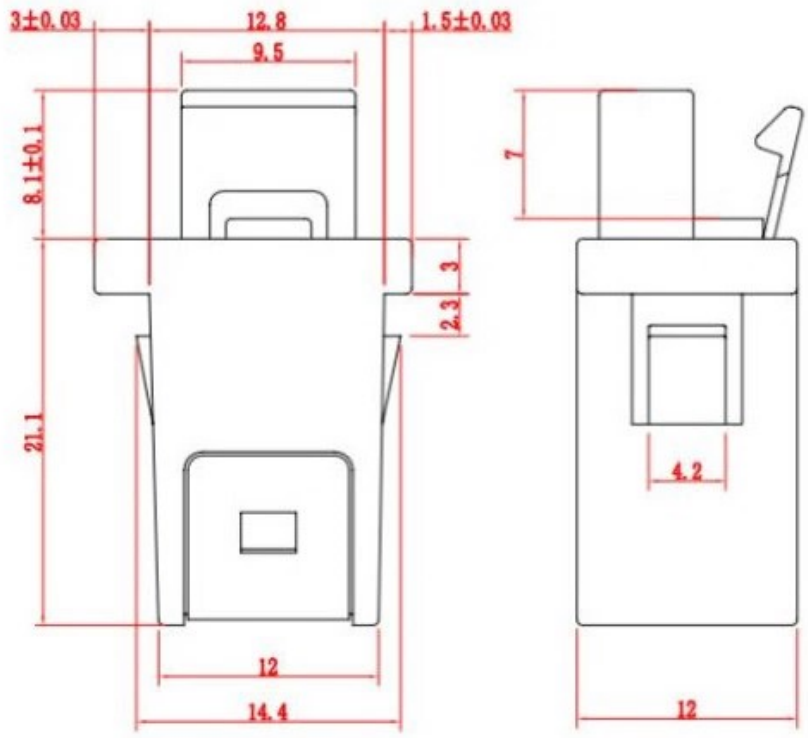

安装孔参考规格

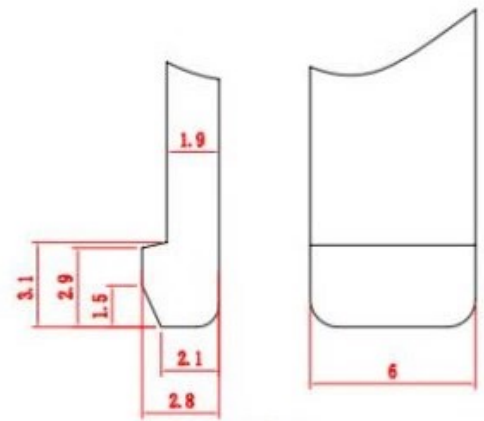

1.5: 1
锁舌参考规格

主要技术规格:

- 寿命次数: 5000次
- 按力: 3-5N
- 接触电阻: $\approx 30m\Omega$
- 温度范围: $-25 \sim +85^{\circ}C$
- 额定负荷: DC 12V 0.1A
- 耐压: AC 250V (50Hz) /min
- 绝缘电阻: $> 100M\Omega$
- 承受最大拉力: 50N

TITLE	DOOR LATCH SWITCH	DRAWN	TOLERANCE OTHERWISE UNLESS SPECIFIED		8			
PART NO.		CHECKED	UP TO 5	± 0.2	7			
DRAW NO.	DL1	APPROVED	ABOVE 5 ~ 30	± 0.3	6			
SCALE: 2:1	UNIT: mm	DATE:	ABOVE 30 ~ 50	± 0.4	5			
			ABOVE 50	± 0.5	4			
			ANGLE	$\pm 3'$	3	SPRING	SUS	1 NI PLATED
					2	HOUSING	POM	1 BLACK
					1	SLIDER	PA12	1 BLACK
					NO.	PARTS	MATERIAL	QTY. FINISHING

东莞市溪榜电子有限公司
Dongguan Xi Bang Electronic Co., Ltd