



Specifications	
Rating	1A 14.5VDC
Temperature	-40°C ~ 85°C
Contact Resistance	≤ 100mΩ
Insulation Resistance	≥ 100MΩ (at 500VDC)
Dielectric Strength	Pole-pole 100VAC/10mA/1min
	Pole-housing 500VAC/10mA/1min
Electrical life	30000 cycles
Operating force	(3.0 ± 0.3) N
Per travel	(2.3 ± 0.15) mm
Total travel	(2.7 ± 0.15) mm

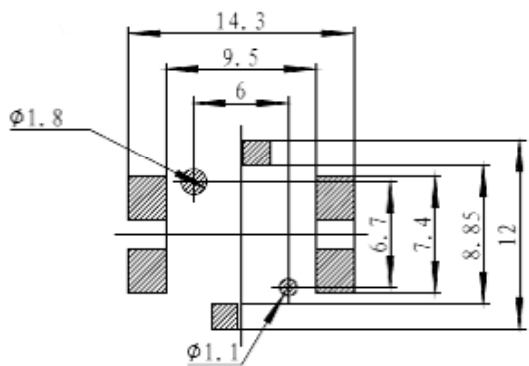

PC board mounting hole dimensions (Viewed from the direction A)

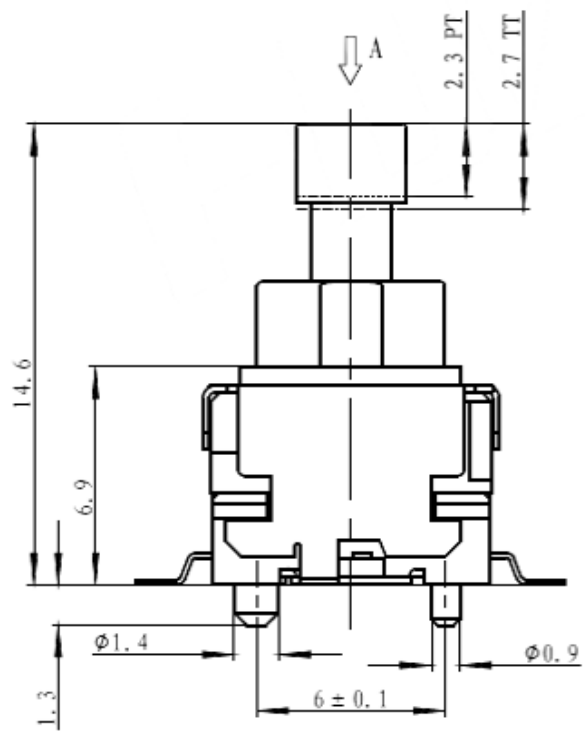

标记 SIGN	处数 FREQUENCY	更改文件号 REVISION	签名 APPROVED	日期 DATE	比例 SCALE	1:1	一般公差 GENERAL TOLERANCE
设计 DESIGN		Zhenming.Chen		2013.05.17	单位 UNIT	mm	>0.5~2 ±0.10
审核 CHECKED		Hu.li		2013.05.17	重量 WEIGHT		>2~5 ±0.25
批准 APPROVED		Jinzhou.Wang		2013.05.17			>5~10 ±0.30
							角度 ANGLE ±0.5°

名称/NAME: 按键开关  
PUSH SWITCH

型号/MODEL: D7-P1149