

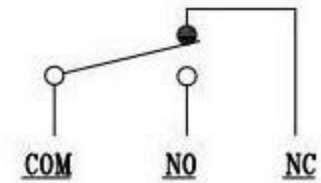
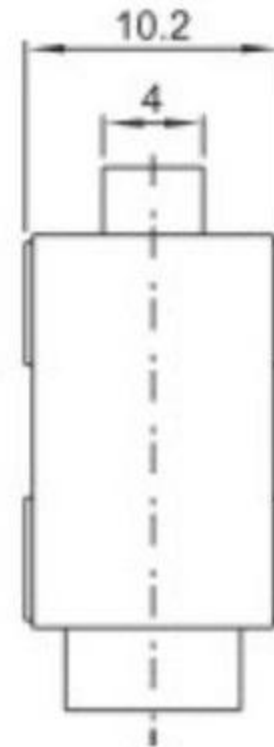


CAD FILE:

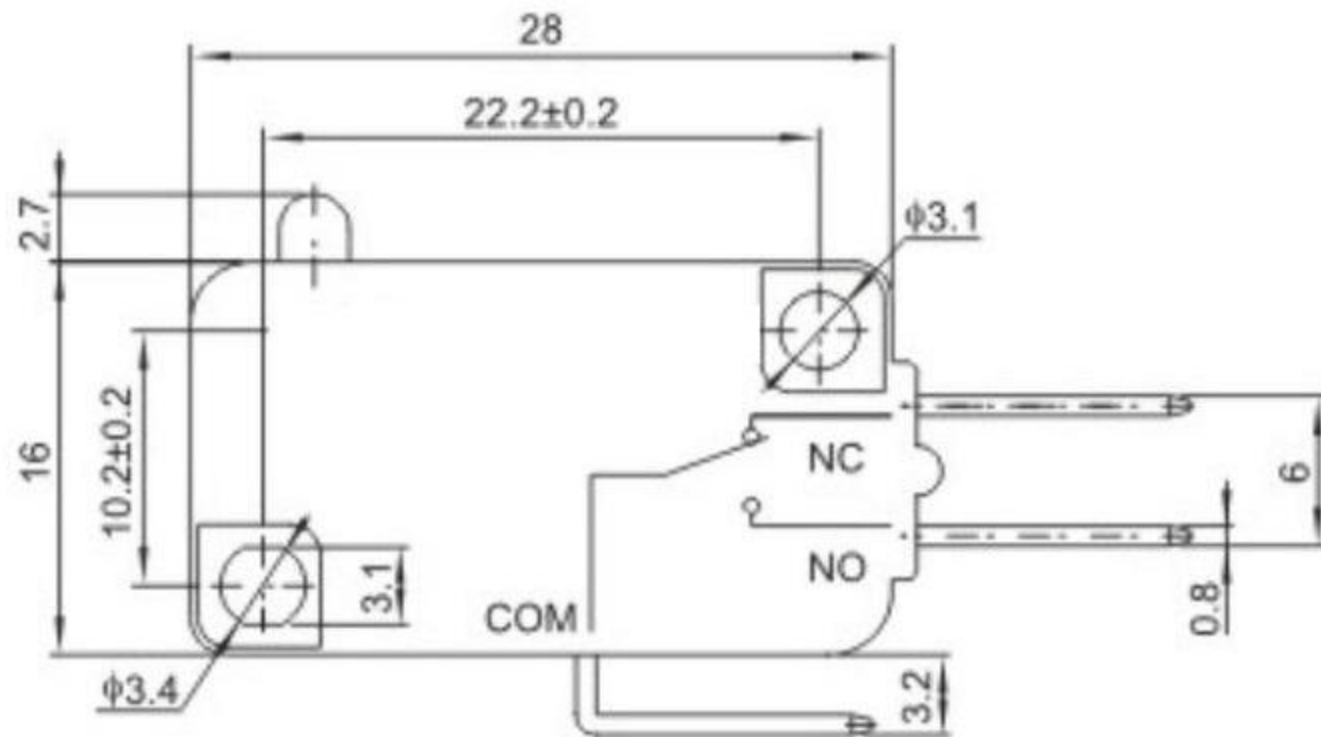

SCHEMATIC (NON-SHORTING)

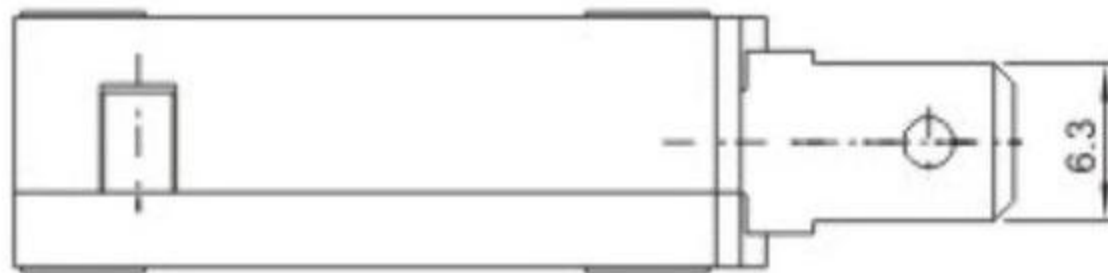

額定電流、電壓 RATING 16A 250VAC μ 1E4 T85
 12A 250VAC/15A 125VAC
 接觸電阻 CONTACT RESISTANCE $\leq 20m\Omega$
 絕緣電阻 INSULATION RESISTANCE $\geq 100M\Omega$
 介電強度 DIELECTRIC INTENSITY $\geq 1250VAC/3S$
 電器壽命 ELECTRICAL LIFE $\geq 10,000$ Cycles

注：“*”口表示关键尺寸(4个).

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED					
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : $\pm 0.1mm$	A	初版			
6	CONTACT	AG	1	NATURAL	OVER 1.5mm : $\pm 0.2mm$	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
5	SHRAPNEL	PBS	1	NATURAL	TITLE : MICRO SWITCH		UNIT : mm	DRWG NO.:		
4	KNOB	PA9T	1	BLACK	MODEL:		SCALE: 3:1	DWN.	刘工	2008.6.8
3	COVER	PA66	1	BLACK	东莞市溪榜电子有限公司		CHK'D	戴海明	2008.6.8	
2	BASE	PA9T	1	BLACK			APPD.	林小姐	2008.6.8	
1	TERMINAL	BRASS STRIP	3	Ag PLATED						