
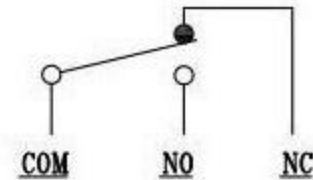
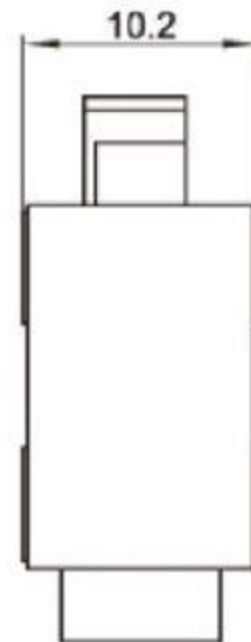


CAD FILE:

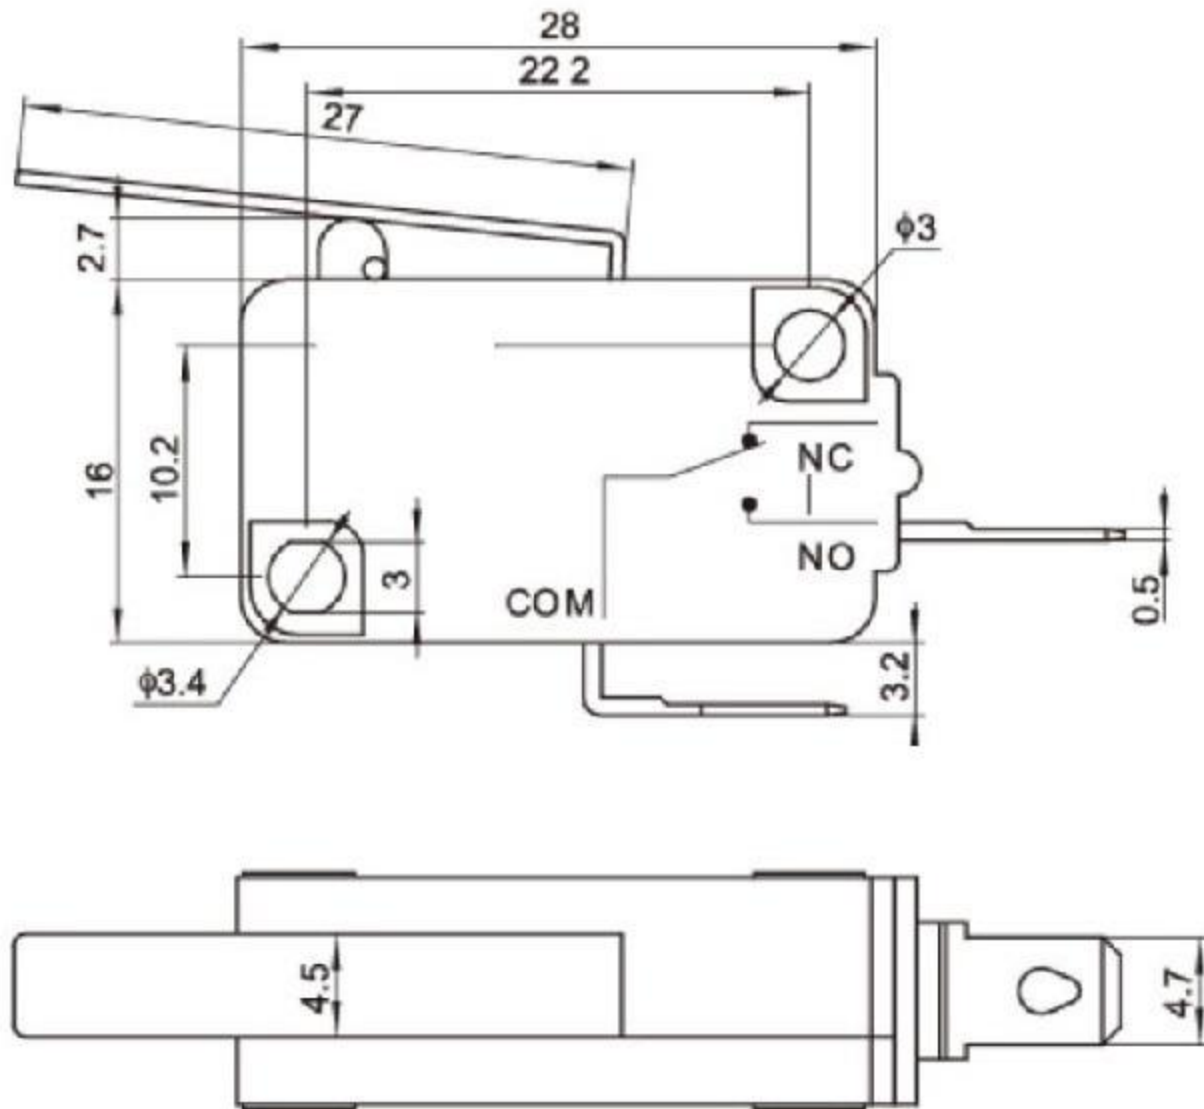

SCHEMATIC (NON-SHORTING)

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC

接觸電阻 CONTACT RESISTANCE

$\leq 20m\Omega$

絕緣電阻 INSULATION RESISTANCE

$\geq 100M\Omega$

介電強度 DIELECTRIC INTENSITY

$\geq 1250VAC/3S$

電器壽命 ELECTRICAL LIFE

$\geq 10,000$ Cycles

注：“*”口表示关键尺寸(4个).

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : $\pm 0.1mm$	A		初版			
6	CONTACT	AG	1	NATURAL	OVER 1.5mm : $\pm 0.2mm$						
5	SHRAPNEL	PBS	1	NATURAL	TITLE : MICRO SWITCH				UNIT : mm	DRWG NO.:	
4	KNOB	PA9T	1	BLACK	MODEL:				SCALE: 3:1		
3	COVER	PA66	1	BLACK	东莞市溪榜电子有限公司				DWN.	刘工	2008.6.8
2	BASE	PA9T	1	BLACK					CHK'D	戴海明	2008.6.8
1	TERMINAL	BRASS STRIP	3	Ag PLATED					APPD.	林小姐	2008.6.8