
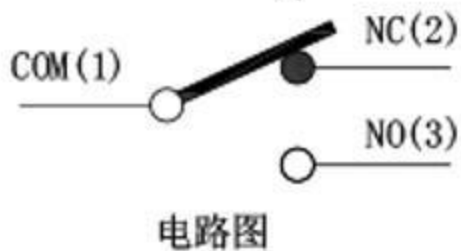
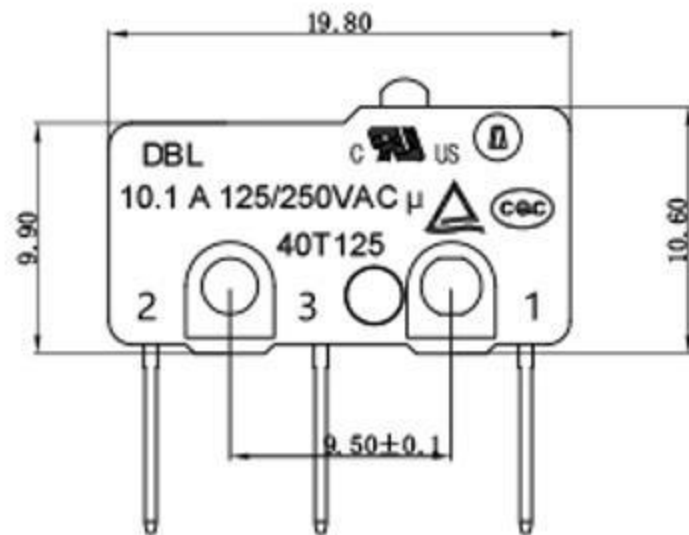
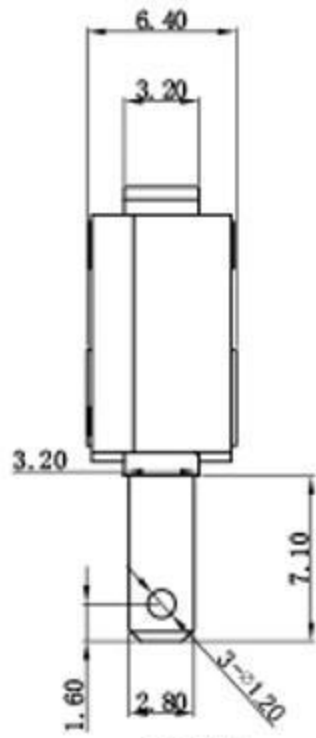


Rating	10.1A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	150gf MAX

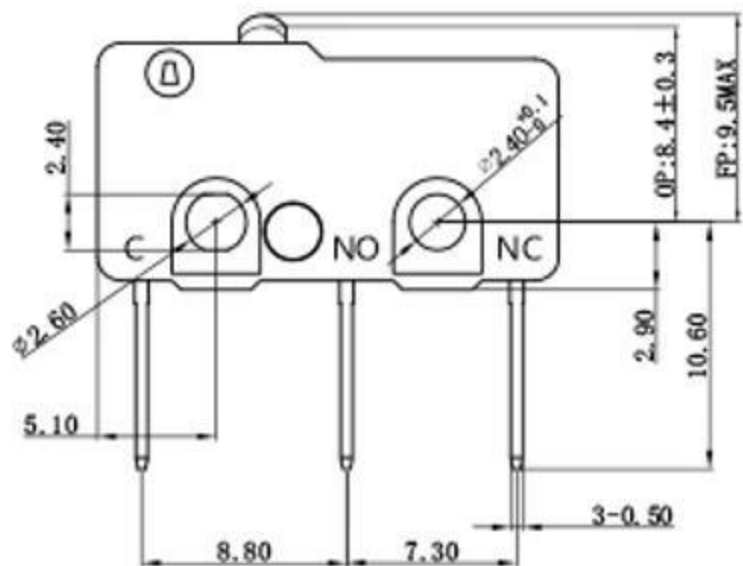

10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	C2690	
5	NC端子(NC TERMINAL)	1	C2690	
4	COM端子(COM TERMINAL)	1	C2690	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

东莞市溪榜电子有限公司

微动开关

制 图 DRAWN	林志鹏	审 计 DESIGN	廖晓斌	审 核 CHECKED	杨瑞涛	批 准 APPROVE	廖晓斌
版 本 REV	01	日 期 DATE	2023.08.01	变 更 内 容 DEFINITION	修 改 DRAW	批 准 APPROVE	廖晓斌

比例 SCALE	4:1	名 称 TITLE	微动开关				
张 数 SHEET	1/1	料 号 P/N NO.					
一 般 公 差 TOLERANCE	H9/h9	单 位 UNIT	mm	模 具 编 号 P/N NO.			
	M3	角 度 ANGLES	±2.0°	图 号 SIZE			
				工 程 图 ENG DRAW			