
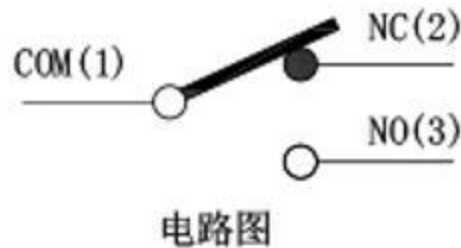
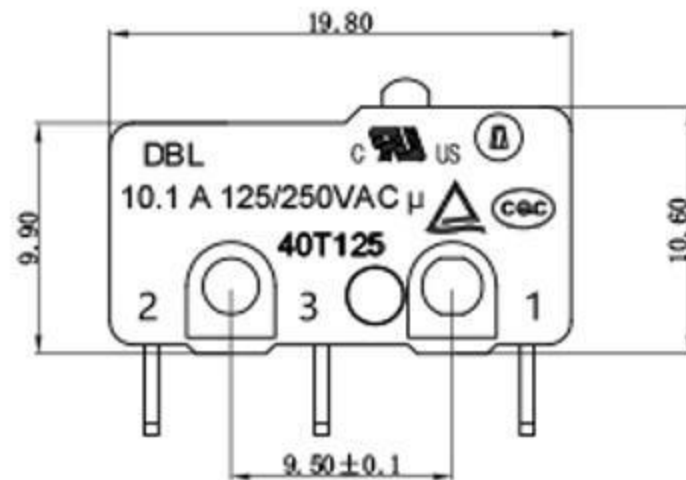
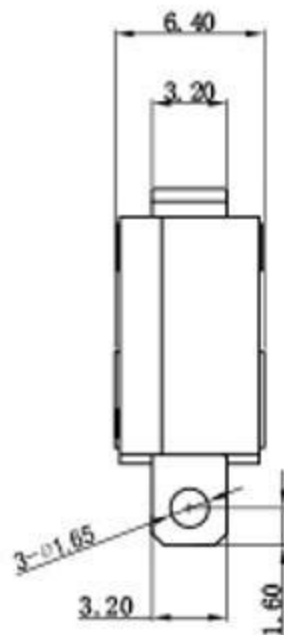


Rating	10.1A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	200gf MAX

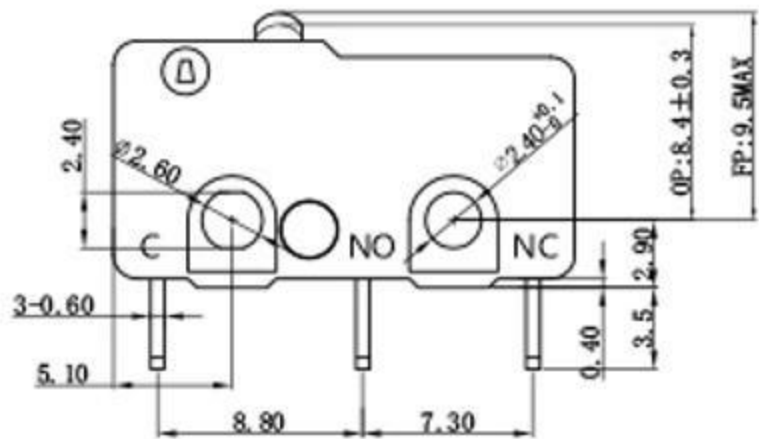

序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes
10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C5210	
6	NO端子 (NO TERMINAL)	1	C2600	
5	NC端子 (NC TERMINAL)	1	C2600	
4	COM端子 (COM TERMINAL)	1	C2600	
3	按钮 (BUTTON)	1	PBT	UL94V-0
2	下盖 (BASE)	1	PBT	UL94V-0
1	上盖 (COVER)	1	PBT	UL94V-0

制图 DRAWN	总工 DESIGN	东莞市溪榜电子有限公司			
设计 DESIGN	审核 CHECK				
审核 APPROVE	日期 DATE	比例 SCALE	4:1	名称 TITLE	微动开关
数量 QTY	日期 DATE	张数 SHEET	1/1	料号 P.N. NO.	
一般公差 TOLERANCE	公差 DIM	单位 UNIT	mm	模具编号 P.N. NO.	
公差 DIM	公差 DIM	角度 ANGLES	±2.0°	料号 SIZE	

版本 REV	变更内容 DEFINITION	日期 DATE	修改 DIM	批准 APPROVE



工程图
ENG DIM