
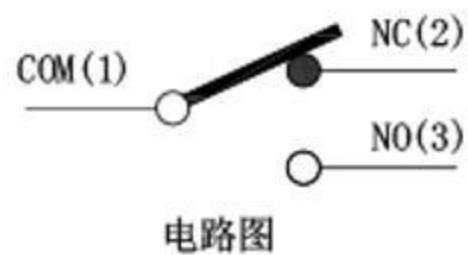
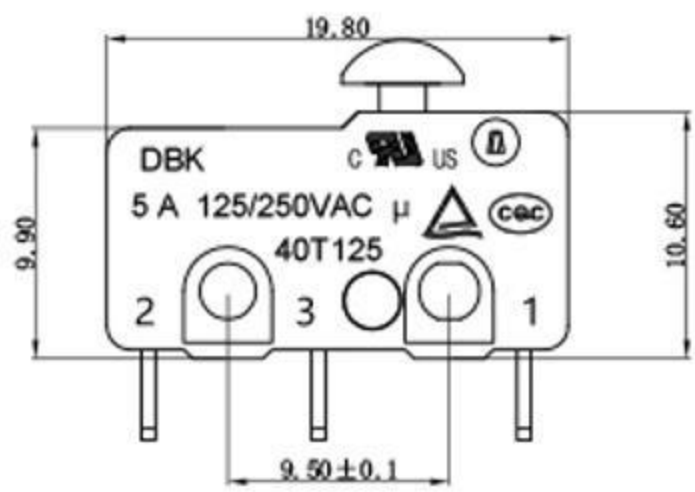
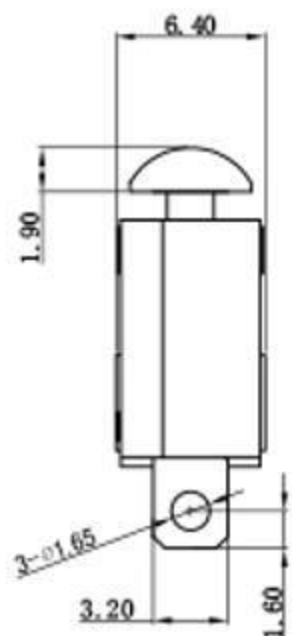
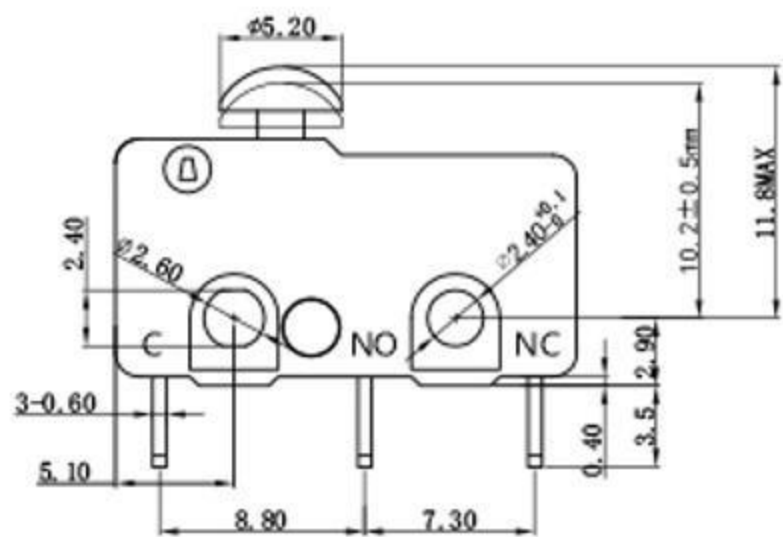


A		B		C		D		E		F		G		H	
						Rating		5 A 125/250VAC		Mechanical Life		1,000,000 cycles			
						Contact Resistance		100m Ω		Electrical Life		10,000 cycles			
						Insulation Resistance		>100M Ω DC500V		Ambient Temper. Used		-40℃ to +125℃			
						Withstand Voltage		AC1500V 1min.		Ambient Humidity Used		≤85% at +40℃			
						Soldering Temper.		235±5℃ 5s		Operating Force		200gf MAX			

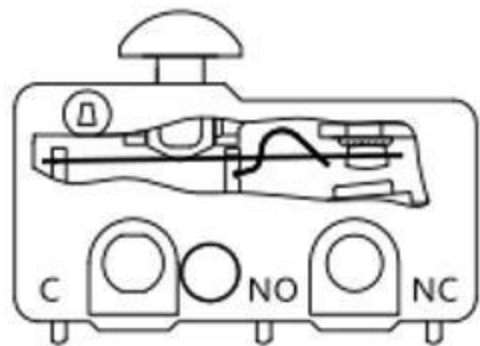

10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片 (SPRING)	1	C17200	
7	弹片 (SPRING)	1	C6210	
6	NO端子(NO TERMINAL)	1	C2600	
5	NC端子(NC TERMINAL)	1	C2600	
4	COM端子(COM TERMINAL)	1	C2600	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

东莞市溪榜电子有限公司

制图	林志鹏	比例	4:1	名称	微动开关
设计	廖晓斌	张数	1/1	料号	
审核	翁瑞峰	单位	mm	器具编号	
批准	廖晓斌	角度	±0.0°	图例	
一般公差	H9-D9 ±0.20				
	M9-D9 ±0.15				
	F9-D9 ±0.10				
	C9-D9 ±0.08				
公差	TOLERANCE				

版本	版本	日期	变更内容	修改	批准
REV.	REV NO.	DATE	DESCRIPTION	DATE	APPROVE