

外形参数

OF Max: 130gf


RF Min: 20gf

PT Max: 0.8mm

DT Max: 0.2mm

FP Max: 4.2mm

OP: 3.05 ± 0.2 mm

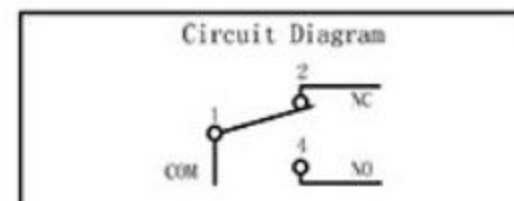

CHARACTERISTICS	
OPERATING FORCE(OF):	200gf Max.
RELEASE FORCE(RF):	50gf Min.
OPERATING POSITION:	8.40 ± 0.30 mm.
FREE POSITION :	9.7 mm MAX
PRE TRAVEL:	1.3 mm Max.
DIFFERENTIAL TRAVEL:	0.20 mm Max.
OVER TRAVEL:	0.60 mm Min.

ELECTRICAL DATA	
RATING	OPERATING LIFE
5A 125/250VAC	10,000 CYCLES
MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP.	$-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
WATERPROOF	IP67

OUTLINE DRAWING			
TITLE	H5 SERIES MICRO SWITCH		
MODEL	H5-A1		
PART NO.			
DRAFTED BY	SHUANG WANG	DATE	2021-1-20
CHECKED BY	SHIGANG YOU	DATE	2021-1-20
APPROVED BY	MATH	DATE	2021-1-20

TOLERANCE UNLESS OTHERWISE SPECIFIED						
<3	3~5	5~10	10~30	30~100	100~200	ANGLE
± 0.2	± 0.3	± 0.4	± 0.6	± 1.0	± 1.5	$\pm 3.0^{\circ}$
					SCALE	
					UNIT	mm
					VERSION	REV
						AO

溪榜电子有限公司