
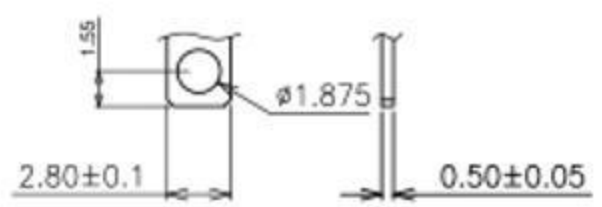
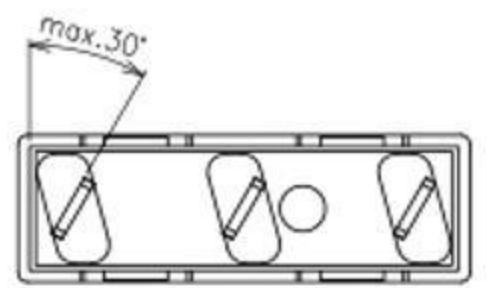
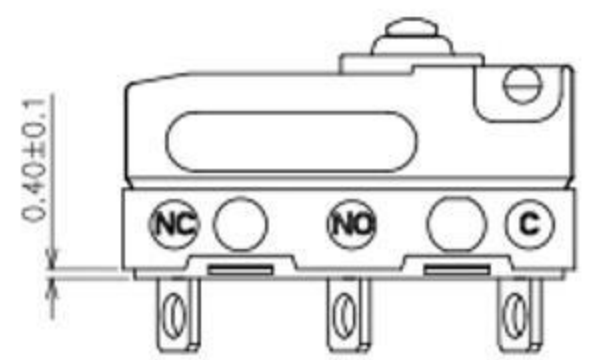
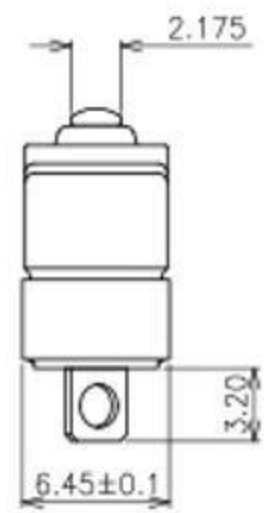


REV	DOCUMENT	CHANGED BY	CHECKED BY

Characteristic(without lever)

OF	RF	PT	DT	OT
340cN max.	80cN min.	1mm max.	0.1mm max.	0.6 mm min.

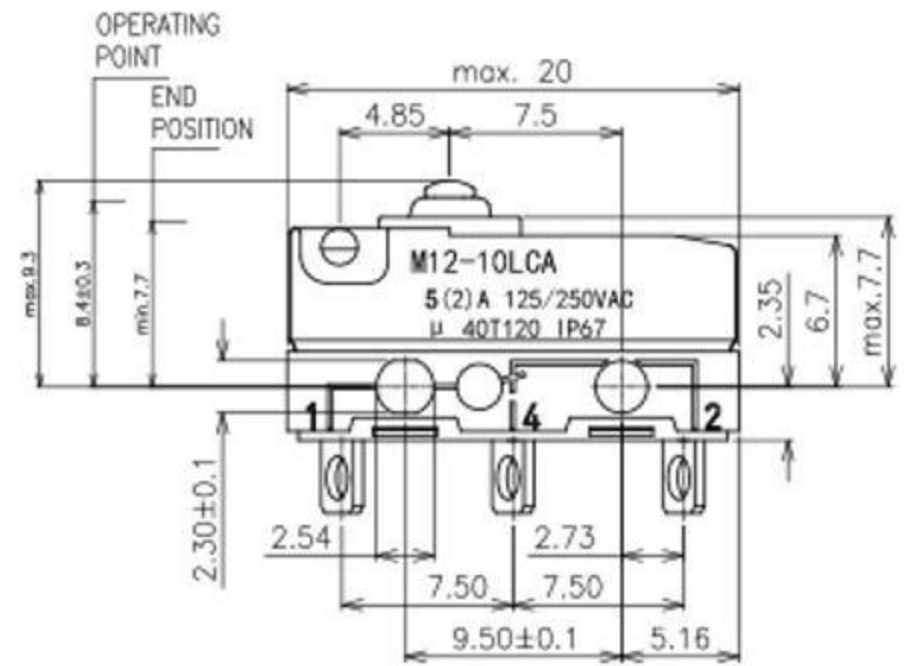

Technical specifications

Rating:5A 125/250VAC  
 Operating force:340g max.  
 Mechanical life:1\*10<sup>6</sup>  
 Electrical life:1\*10<sup>4</sup>  
 Ambient temperature:-45 to 120° C  
 Degree of protection:IP67

一般公差 GENERAL TOLERANCE		单位 UNIT	2000	东莞市溪榜电子有限公司						
.X±0.5	ANGLES	材料 MATERIAL	/	名称 TITLE	防水微动开关					
.XX±0.3	L.° ±5°	体积 VOLUME	/	料号 PART NO.						
.XXX±0.1	.X° ±2°	重量 WEIGHT	/	图号 DRAWING NO.						
设计 DESIGNED		表面积 SURFACE	/	角注 F E O J.	图幅 SIZE	A3	比例 SCALE	4:1	版本 REV.	A0
审核 CHECKED		图类 TYPE	站立图					张数 SHEET	1/1	
批准 APPROVED	2003.06.03									