

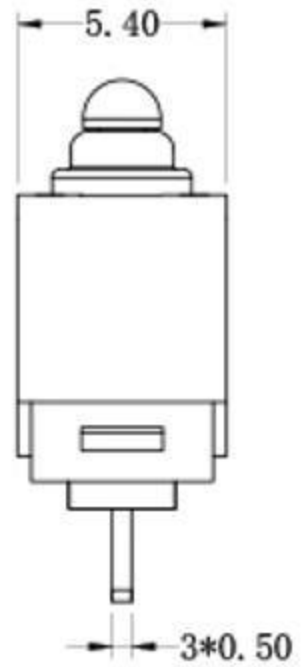
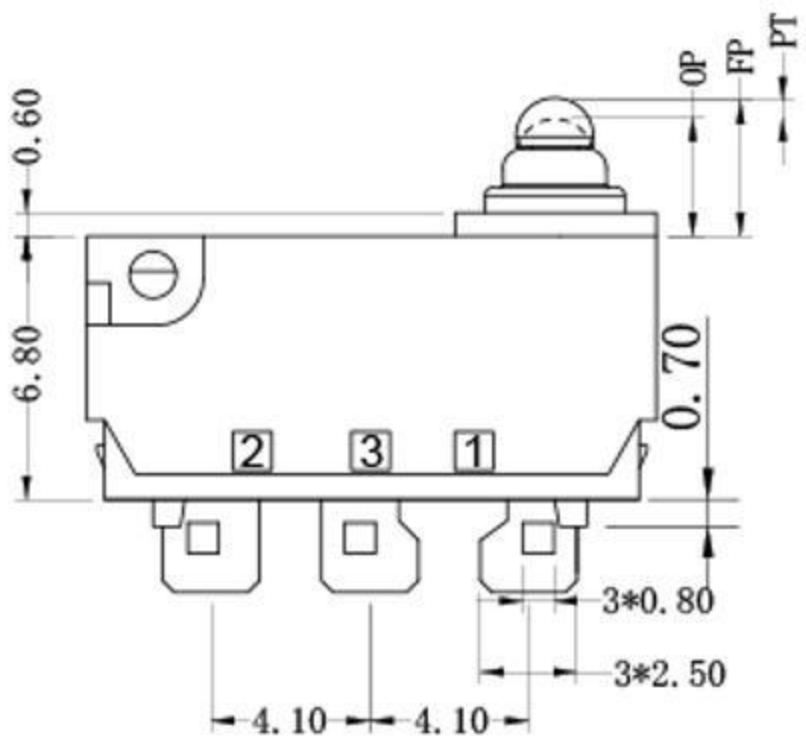


REV	MARK	DESCRIPTION	DRAFTED. BY	DATE

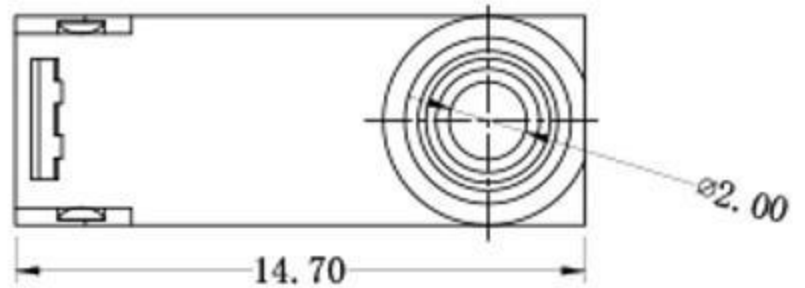

CHARACTERISITICS	
OPERATING FORCE(OF):	130gf Max.
RELEASE FORCE(RF):	13gf Min.
OPERATING POSITION:	3.05±0.20 mm.
PRE TRAVEL:	0.8mm Max.
DIFFERENTIAL TRAVEL:	0.2mm Max.
OVER TRAVEL:	0.8mm Min.

ELECTRICAL DATA	
RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES
MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP.	-40℃~+85℃
WATERPROOF	IP67

OUTLINE DRAWING		TOLERANCE UNLESS OTHERWISE SPECIFIED							
TITLE	H3 SERIES MICRO SWITCH	<3	1~3	3~10	10~30	30~100	100~200	ANGLE	
MODEL	H3-E1	±0.2	±0.3	±0.4	±0.6	±1.0	±1.5	±3.0°	
PART NO.								SCALE	
DRAFTED BY	LV ZHIPENG	DATE	2020-7-21					UNIT	
CHECKED BY	YANG HONGTAO								VER
APPROVED BY	TANG XIAOBO								VERSION REV
									A1

东莞市溪榜电子有限公司