
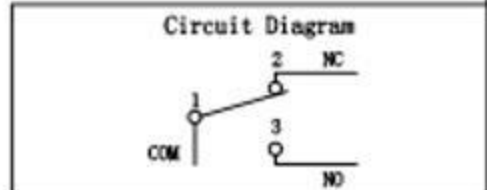
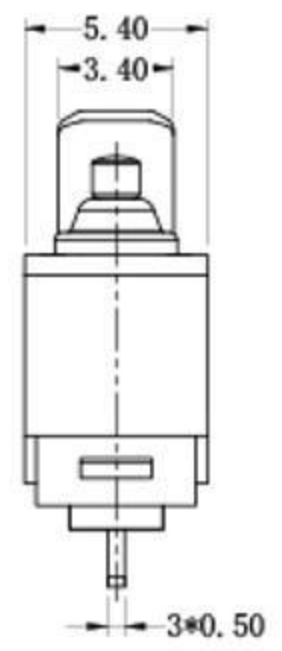
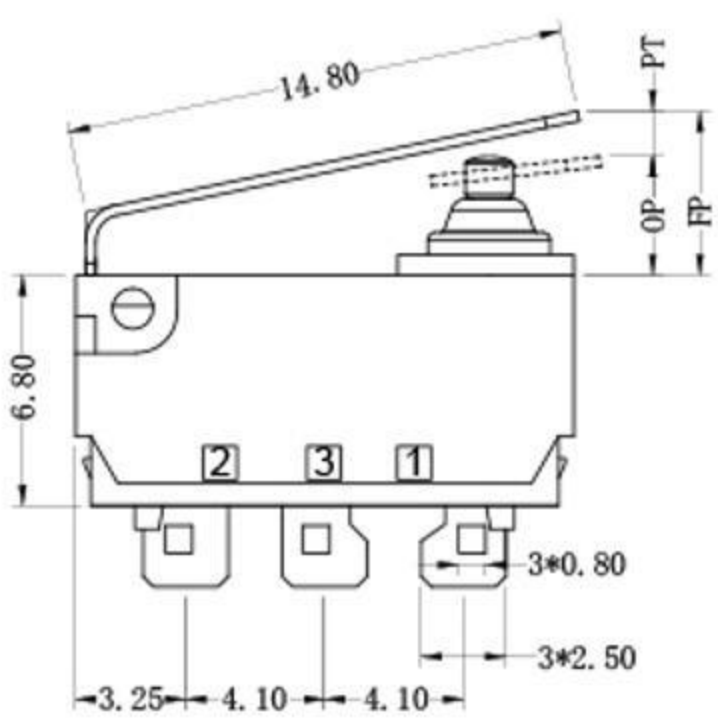


REV	MARK	DESCRIPTION	DRAFTED. BY	DATE

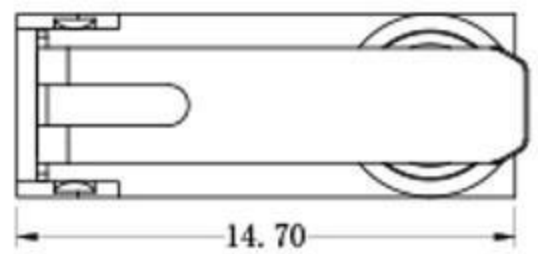

CHARACTERISTICS	
OPERATING FORCE (OF):	195gf Max.
RELEASE FORCE (RF):	25gf Min.
OPERATING POSITION:	3.7 ± 0.6 mm.
PRE TRAVEL:	3.5mm Max.
DIFFERENTIAL TRAVEL:	0.6mm Max.
FREE POSITION:	6.8mm Max.

ELECTRICAL DATA	
RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES
MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP	-40°C ~ +85°C
WATERPROOF	IP67

OUTLINE DRAWING		TOLERANCE UNLESS OTHERWISE SPECIFIED														
TITLE	H3 SERIES MICRO SWITCH	<3	1~3	3~10	10~30	30~100	100~200	ANGLE								
MODEL	H3-A1	±0.2	±0.3	±0.4	±0.6	±1.0	±1.5	±3.0°								
PART NO.																
DRAFTED BY	LV ZHIPENG								DATE	2020-6-15						
CHECKED BY	YANG HONGTAO															
APPROVED BY	TANG XIAOBO	<table border="1"> <thead> <tr> <th>SCALE</th> <th>UNIT</th> <th>VER</th> <th>REV</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td>A1</td> </tr> </tbody> </table>							SCALE	UNIT	VER	REV				A1
SCALE	UNIT	VER	REV													
			A1													

东莞市溪榜电子有限公司