

主要技术特性要求:

1. 使用条件:

环境温度: -25~70℃

相对湿度: 95% (40℃)

2. 额定负荷: 2A 12V DC

3. 接触电阻: ≤30mΩ


4. 绝缘电阻: ≥100MΩ

5. 耐 压: AC250V (50Hz) 1min

6. 插 拔 力: 5-35N

7. 寿 命: 5000次

PCB板安装孔图

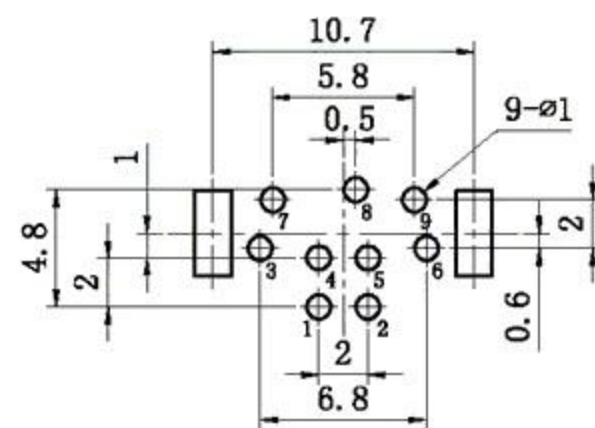

10	铜壳	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
9	左长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
8	右长针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
7	左中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
6	右中针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
5	右短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
4	左短针	1	黄铜带H62 Y=0.35mm	D. Cu/Sn			
3	包圆	1	黄铜带H62 Y1=0.25mm	D. Cu/Sn			
2	塑料后盖	1	PBT				
1	基座	1	PBT				
序号	名称	数量	材 料	处 理	单件 质 量	总计 量	备 注

A4				普通公差		 东莞市溪榜电子有限公司			
A3				COMMON TOLERANCE :					
A2				X.XX	±0.10	单 位	mm	投 影	品 名
A1				X.X	±0.15	UNIT		PROJECTED	PRODUCT NAME
REV.	DATE	REVISION	DESCRIPTION	ISSUE	X	±0.25	绘 图	核 对	型 号
					ANGULAR	±3°	DRAWN BY	CHCKED BY	MODEL NO.
							日 期	核 准	图 号
							2013.04.15	APPROVAL BY	DWG NO.
S端子 DIN插座									