

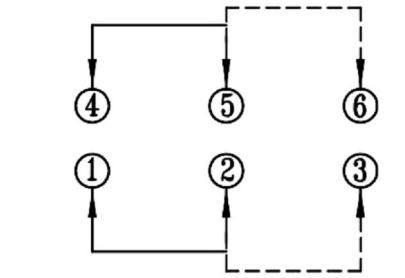
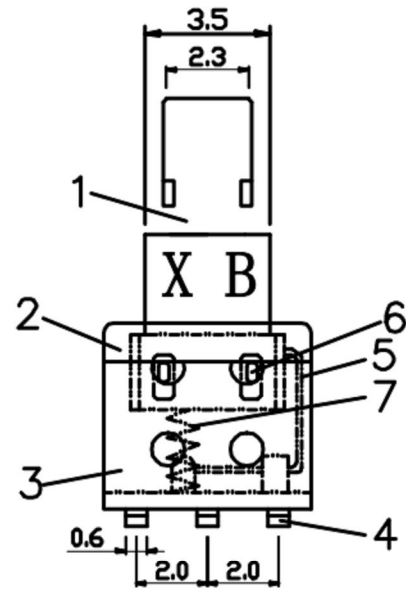
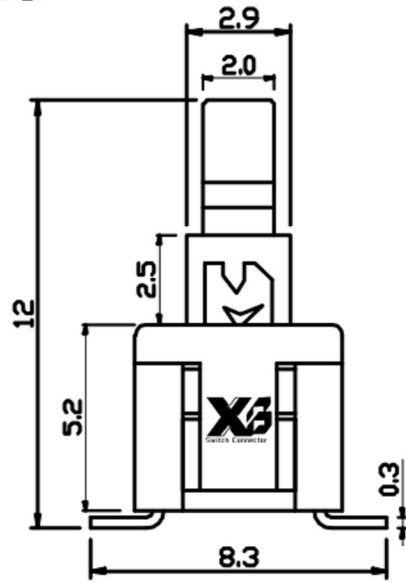


**ROHS**

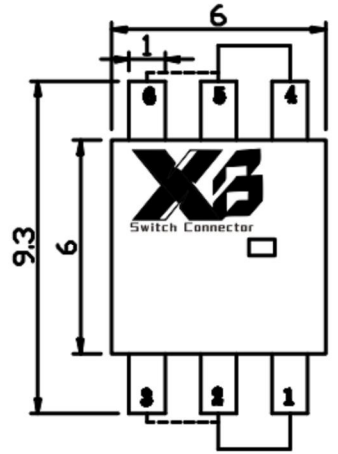

**SCHEMATIC (NON-SHORTING)**

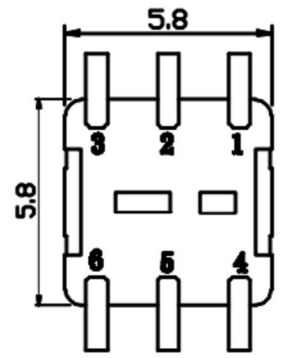

**常态 FREE 1-2, 4-5**  
**按下 PUSH 2-3, 5-6**

SCHEMATIC

**SPECIFICATION (INITIAL)**

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	160gf ±50gf
SWITCHING LIFE:	10K Cycles(6-10c/m loading)

序号	名称	数量	材料	表面处理
7	弹簧	1	碳素钢	
6	接触夹	2	覆合银铜皮	
5	钩针	1	精密钢丝	
4	引脚	6	黄铜H62	镀银
3	底座	1	PA46	
2	盖板	1	PA66	
1	推轴	1	PA66	

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

	<b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD									
	TITLE : XB Puhs Button switch					7	HOOK NEEDLE	STEEL WIRE	1	NATURAL
	MODEL : XB-5858L-13M 立贴自锁开关六脚 2P2T					6	SPRING	STEEL WIRE	1	NATURAL
UNIT : MM	DWN.	ZENQ. CHEN	DATE		5	CONTACT	PBS	1	Ag PLATED	
SCALE : 2 : 1	CHK'D	DONG. PANG	DATE		4	TERMINAL	BRASS STRIP	6	Ag PLATED	
VERSION	01	APPD.	FEI. LONG. HE	DATE		3	CASE	NYLON	1	BLACK
						2	COVER	NYLON	1	BEIGE
						1	NOB	POM	1	WHITE
						NO.	PART NAME	MATERIAL	QTY.	FINISHING