


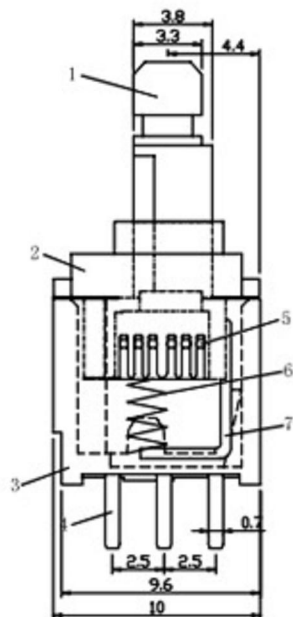



ROHS

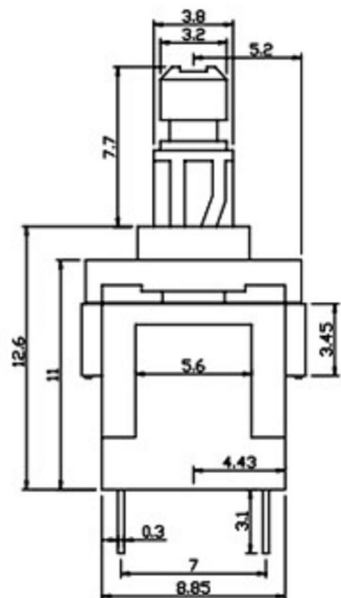

印制电路板
printed-circuit board




常态 FREE 1-2 4-5
按下 PUSH 2-3 5-6
电路图
circuit diagram



SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ at 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	160gf ±50gf
SWITCHING LIFE:	10K Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 <h2 style="text-align: center;">东莞市溪榜电子有限公司</h2> <h3 style="text-align: center;">DONG GUAN XI BANG ELECTRONICS CO., LTD</h3>													
					TITLE : VERTICAL PUSH SWITCH								
MODEL : XB-8510-6P													
UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE	ANGLE TOL							
SCALE : 2 : 1	CHK'D	PENG. GAO	DATE		<=1.5mm ± 0.1	± 2°							
VERSION	01	APPD.	DONG. PANG	DATE	> 1.5mm ± 0.2								
					>=10.0mm ± 0.3								
							7	HOOK NEEDLE	STEEL WIRE	1	NATURAL		
							6	SPRING	STEEL WIRE	1	NATURAL		
							5	CONTACT	PBS	1	Ag PLATED		
							4	TERMINAL	BRASS STRIP	6	Ag PLATED		
							3	CASE	NYLON	1	BLACK		
							2	COVER	NYLON	1	BEIGE		
							1	KNOB	POM	1	WHITE		
							NO.	PART NAME	MATERIAL	QTY.	FINISHING		