






XB-MSK-008-L


Model No.	X (mm)
Blank	2.0
A	4.0

SLIDER COLOR :


Black	: B
White	: W

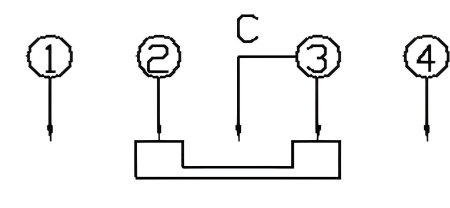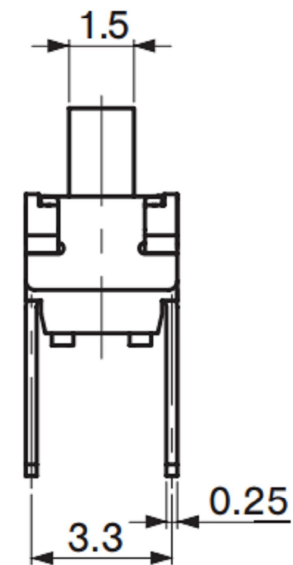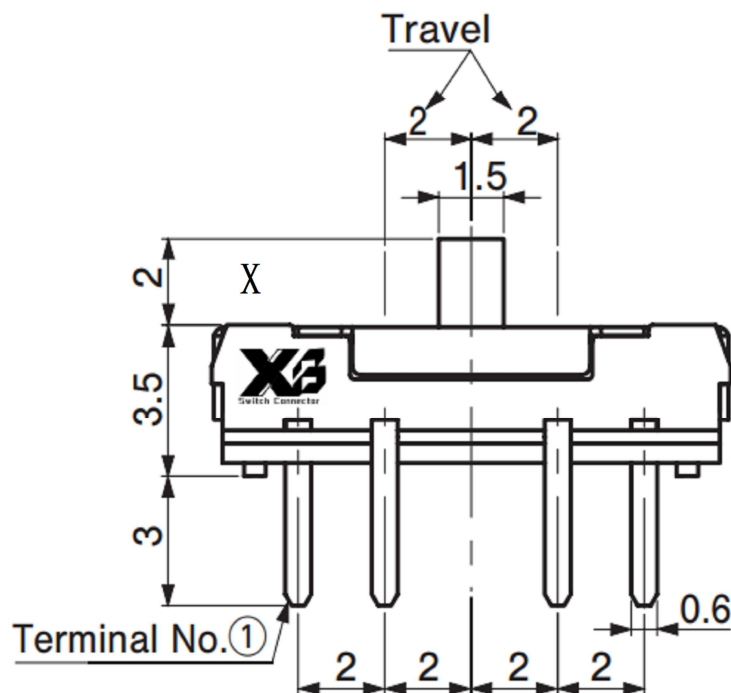

CIRCUIT DIAGRAM

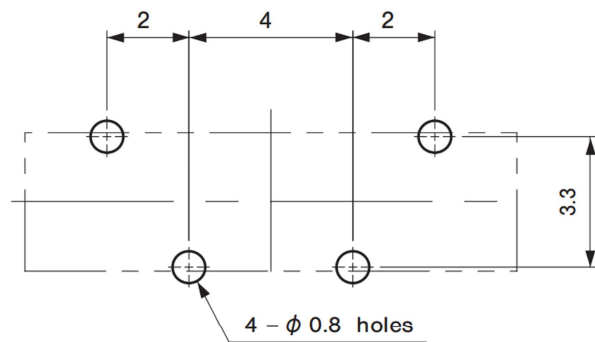

P.C.B LAND PATTERN

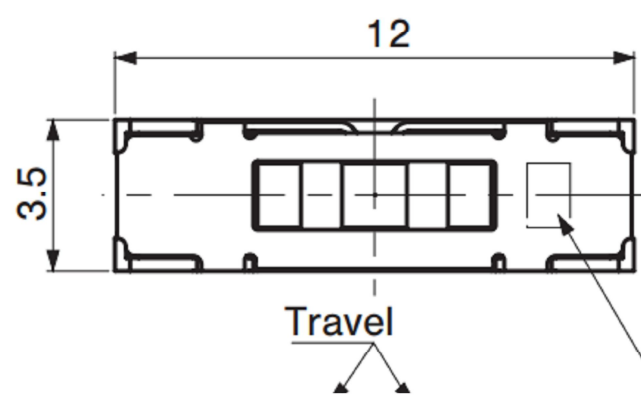

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 70gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA	Black
A	SLIDER	1	PA	Black

MAT'L	TITLE	SWITCH
FINISH	MODLE	SLIDE SWICTH
SCALE	1 : 1	DWG NO. XB-MSK-008-L
SHEET NO.	1 of 1	PART NO.

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu 09/09/21
CHECKED BY: Jacky Chen 09/09/21
APPROVED BY: Tony Kao 09/09/21

ITEM NO.	DESCRIPTION	DRAWN	DATE