
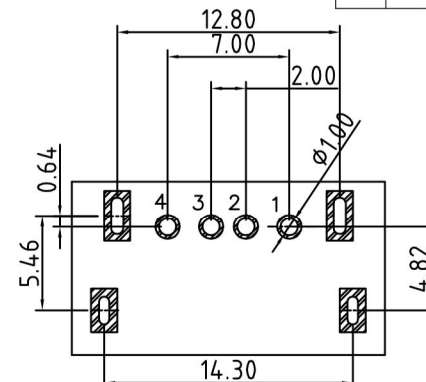
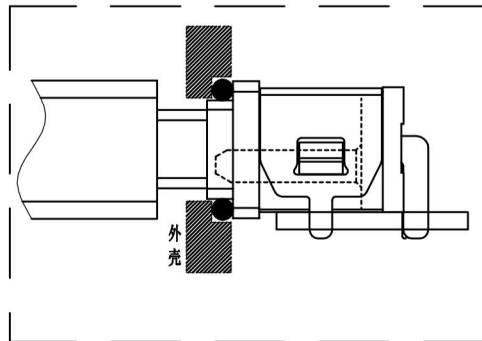


ROHS

REV.	ECN. NO.	APPD.





RECOMMENDED PCB LAYOUT(TOP VIEW)
 DEFAULT TOLERANCE+/-0.05
 THICKNESS T=1.6mm

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

NOTES:
 SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

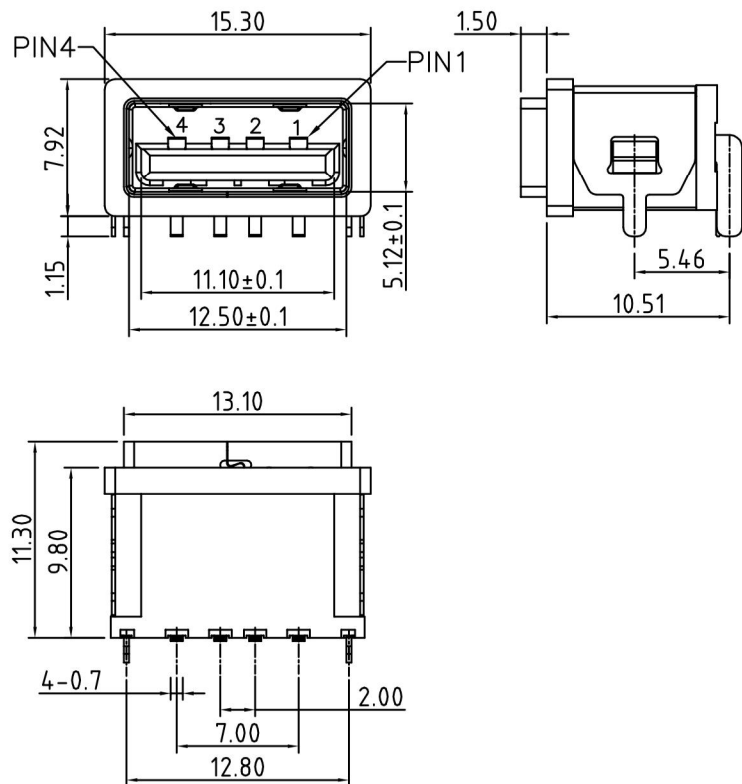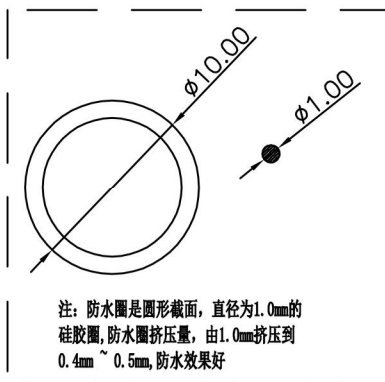

X.	±0.50	X.*	±2°	UNITS mm
.X	±0.30	.X*	±1°	
.XX	±0.10	.XX*	±0.5°	
.XXX	±0.05			FINISH /
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD				
Q'TY /				

X3 东莞市溪榜电子有限公司
 SWITCH CONNECTOR DONG GUAN XI BANG ELECTRONICS CO., LTD

PART NO. XB-USB-A-4P-1195-IPX7 TITLE: IP68 USB 2.0 A TYPE

APPD: GAO. PENG DWG NO: XB-USB-A-4P-1195-IPX7

CHKD: HE. LONG. FEI

DR: PANG. DONG

SCALE	SHEET	REV.
1/1	1/2	A2

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H Ni Plating	Ni: 40~120U''
3	PLASTIC Shell	1	PA10T (G.F30%)	BLACK UL94-V0
2	Contact	4	BRASS C2680-EH Au/Ni/FoggingTin Plating T=0.25mm	Ni40-160U'',AuContact Area:3U'', Other Area:Fogging Tin.
1	Housing	1	PA10T (G.F30%)	BLACK UL94-V0