东莞市溪榜电子有限





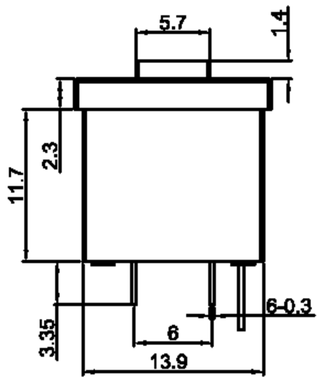

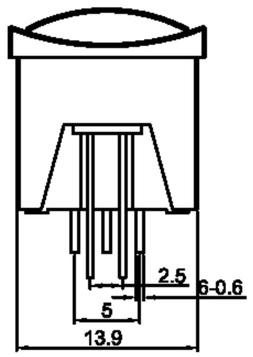



BOTTOM VIEW

Rating: 100mA 30VDC ;
Contact Resistance: 100mΩ Max. ;
Insulation Resistance:DC 500V 100MΩ Min. ;
Dielectric Strength:AC 250V 1 minute
Total Travel: 2.5±0.5mm
Operating Force:200±100gf
Mechanical Life: Over 50,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature:-20°C~70°C
Manual welding:350°C for 3 Seconds

MATERIAL:
- Outer Frame:ABS;
- Base:ABS ;
- Actuator:ABS
- Terminal: Brass,Silver or Tin plated .

Contact Configuration

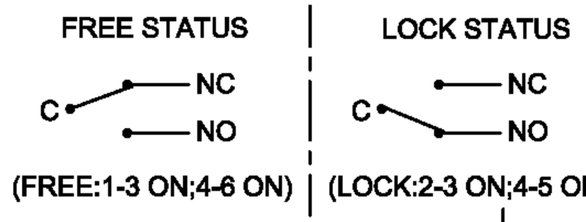



PANEL HOLE



PCB HOLE(BOTTOM VIEW)

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

Note:

1.This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;

2.After the product is welded on the PCB board,it is prohibited to use any solvent to clean the PCB board,and avoid the influence of the inner product.

				公差 TOLEANCES	.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.		
				视角 VIEWING ANGLE		比例尺 SCALE	NONE	日期 DATE	2016.10.07	品名 TITLE	图号 DRAWING NO
A1	增加产品焊锡说明	2016.10.07	N/A								
A0	New Issue	2011.12.08	N/A	核准 APPROVED BY	Richard	核对 CHECKED BY	Sinc	绘图 DRAWN BY	姜庆勇		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.								