

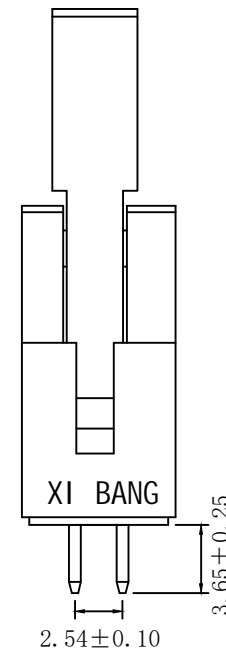


SPECIFICATION XB-NJ-254-XXX series  
 Current Rating :3A  
 Insulator Resistance :1000 Megohms min.  
 Contact Resistance :20milliohms max.  
 Dielectric Withstanding :AC 500V  
 Operating Temperature :-40°C to +105°C  
 Contact Material :Brass  
 Insulator Material :Polyester, UL 94V-0  
 Standard :PA9T  
 Contact Plated :Gold Flash All Over Nickel

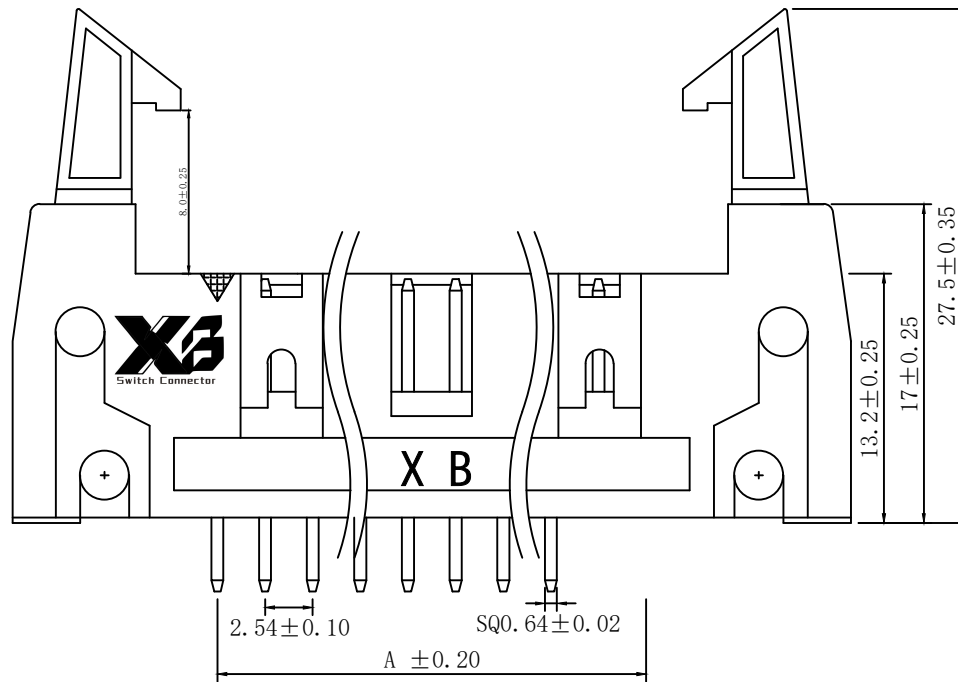

XB-NJ-254-XXX series

PIN NO.	DIMENSION	
	A	B
20P	22.86	44.70
24P	27.94	49.71
26P	30.48	52.32
30P	35.56	57.40
32P	38.1	60.1
34P	40.64	62.48
40P	48.26	70.10
50P	60.96	82.80
60P	73.66	95.50
64P	78.74	100.6

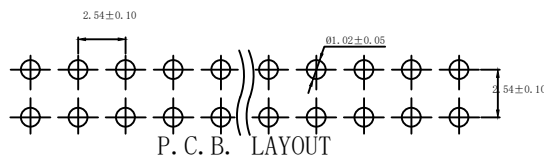

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.					
品名/规格	2.54长耳牛角 (20P或以上PIN) S/T DIP3.65 PA9T				
单位	mm	处理	镀金	版次	A.0
绘图	赵志东	日期	2024-7-18	编码	
审核		日期		页码	1/1