


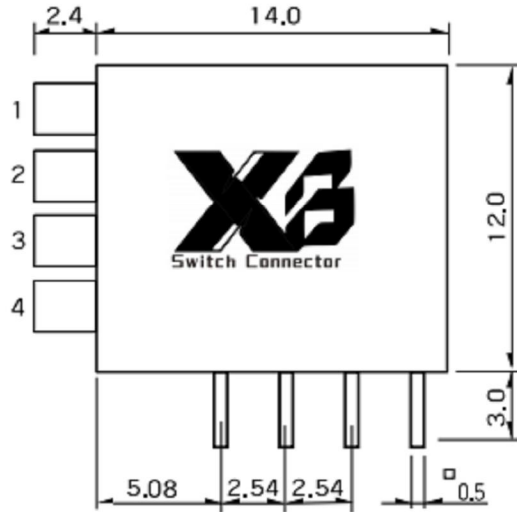



ROHS

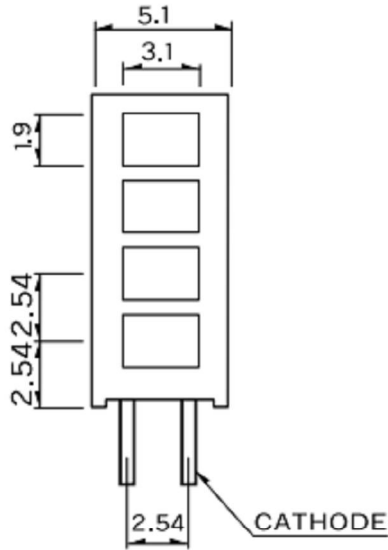

P.C.B DIMENSION

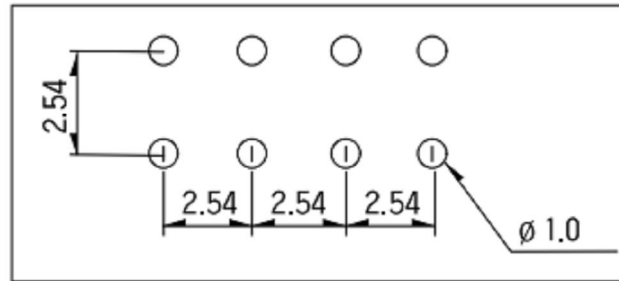

* Reverse Cathode Left : SFG- G
Housing Color : Gray



Number	0	1	2	3	4	8
Color	Blank	Red	Green	Yellow	Amber	Blue
LED Spec	-	BL-R5141F	BL-R2141F	BL-R3141F	BL-RA1141F	BL-RB7131G-P


Package	LED TYPE	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings			Electro-optical Data(At 20mA)		Viewing Angle 2θ (99°)				
			Emitted Color	Peak Wav Length (nm)		ΔI (mV)	Pd (mW)	If Peak (mA)	Vf(V)	η Typ. (mcd)					
High Efficiency	01	BL-B2141K	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50		
		BL-B3141K	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50		
		BL-BA1141K	Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50		
		BL-DB141K	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50		
	Low Current	02	BL-B5141K-L	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45	
			BL-B5141K-L	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50	
			BL-B2141K-L	Green	568	Green Diffused	30	16	7	-	1.9	2.3	7.0	50	
			BL-B3141K-L	Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50	
		Integral Resistor 5V	03	BR-B451K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-
				BR-B2141K-05V	Green	568	Green Diffused	-	-	8	-	5	-	15.5	-
				BR-B3141K-05V	Yellow	585	Yellow Diffused	-	-	8	-	5	-	14.0	-
				BR-B4141K-05V	Orange	635	Orange Diffused	-	-	8	-	5	-	15.5	-
Bi-color	07	BL-BE271E	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45		
		BL-BY271E	Green	568	White Diffused	35	100	30	150	2.1	2.6	20.0	45		
1.0" Lead Flangeless	01	BL-B5133N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40		
		BL-B2133N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	45		
		BL-B3133N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40		
		BL-B5134N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	13.0	45		
	01	T-1 3/4	BL-B2134N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45	
			BL-B3134N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45	
			BL-BB414R	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45	
			BL-BE274N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	45.0	45	
		07	1.0" Lead Flangeless 5θ	BL-BY274N	Green	568	White Diffused	35	100	30	150	2.1	2.6	35.0	45
				BL-BY274N	Yellow	585	White Diffused	30	100	30	150	2.2	2.6	50.0	45
				BL-BY274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
				BL-BY274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
T-1 3/4 1.0" Lead Standard 5θ	07	BL-BEG204	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	40		
		BL-BEG204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40		
		BL-BY204	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	30.0	40		
2.0x5.0x7.0 1.0" Lead Rectangular	07	BL-BY204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40		
		BL-RV7302B-R	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.0	80		

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _f (V)	I _f =20mA	Over U'x1.2
Reverse current	I _r (uA)	V _r =5V	Over U'x2
Luminous intensity	I _v (mcd)	I _f =20mA	Below S'X0.5



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB LED模块系列 XB LED MODULE Series
MODEL : XB-SFG-xxxx



UNIT : MM	DWN.	ZENQ. CHEN	DATE	2024-4-8	TOLERANCE <=1.5mm ±0.1 >1.5mm ±0.2 >=10mm ±0.3	ANGLE TOL ±2°	2	TERMINAL	PBS STRIP	3	Au PLATED
SCALE : 7 : 1	CHK'D	DONG. PANG	DATE	2024-4-8			1	CASE	PBT	1	BLACK
VERSION : 01	APPD.	FEI. LONG. HE	DATE	2024-4-8			NO.	PART NAME	MATERIAL	QTY	FINISHING