

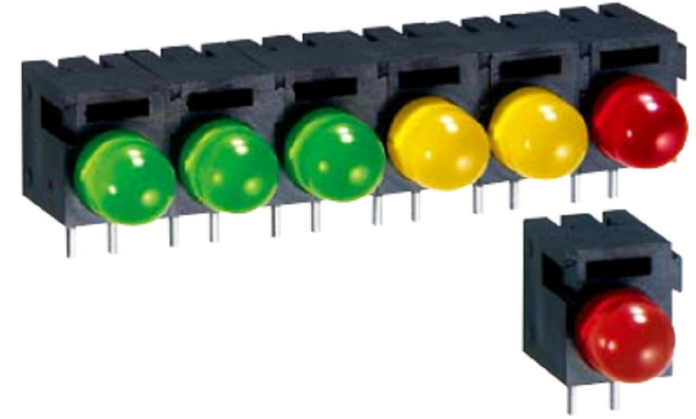
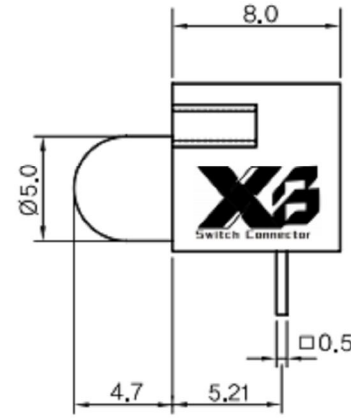



ROHS

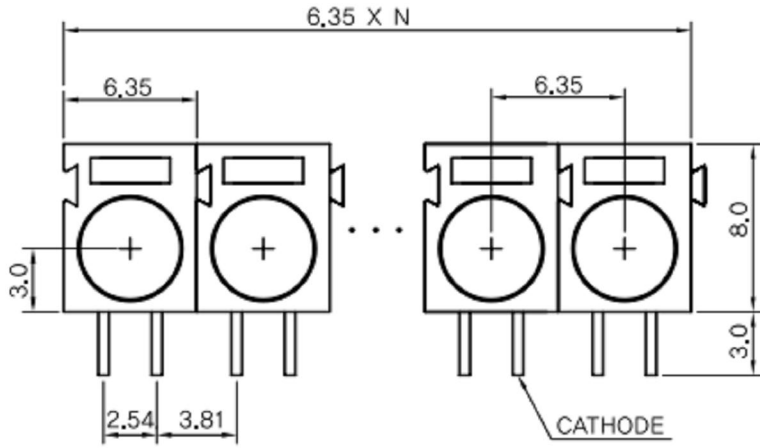

P.C.B DIMENSION

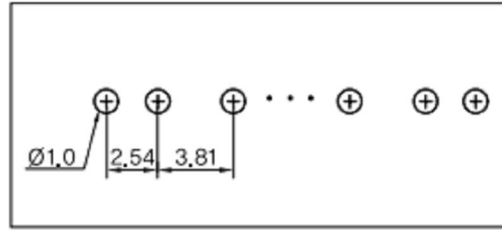

* Reverse Cathode Left :
SEU-01- **XX** - **XX** G
Housing Color : Gray



Number	0	1 (Bi-Color)	2	3	4 (Bi-Color)	8
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue

Package	LED TYPE	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings			Electro-optical Data@20mA	Viewing Angle 2θ (99°)							
			Emitted Color	Peak Wav Length (nm)		ΔI (mA)	Pd (mW)	If Peak (mA)			VfM (V)	Iv Typ. (mcd)					
High Efficiency	01	BL-B2141K	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50				
		BL-B3141K	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50				
		BL-B4141K	Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50				
		DL-D5141K	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50				
	Low Current	02	BL-B5141K-L	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50			
			BL-B3141K-L	Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50			
		Integral Resistor 5V	03	BR-B4541K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-		
				BR-B2141K-05V	Green	568	Green Diffused	-	-	8	-	5	-	15.5	-		
				BR-B3141K-05V	Yellow	585	Yellow Diffused	-	-	8	-	5	-	14.0	-		
				BR-B4141K-05V	Orange	635	Orange Diffused	-	-	8	-	5	-	15.5	-		
			Bi-color	07	BL-BE271E	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45	
					BL-BY271E	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	20.0	45	
				1.0" Lead Flangeless 4.82	01	BL-B5133N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40
						BL-B2133N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	40
BL-B3133N	Yellow	585				Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40			
BL-B4133N	Bright Red	700				Red Diffused	90	50	15	50	2.2	2.6	13.0	45			
T-1 3/4 1.0" Lead Flangeless 5.0	01	BL-B2134N	Green		568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45			
		BL-B3134N	Yellow		585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45			
		BL-BB414R	Super Blue		470	Blue Diffused	30	100	30	100	3.5	4.0	550	45			
		BL-BE274N	Hi-Eff Red		635	White Diffused	45	100	30	150	2.0	2.6	45.0	45			
	07	BL-BE274N	Green		568	White Diffused	30	100	30	150	2.2	2.6	50.0	45			
		BL-BY274N	Yellow		585	White Diffused	35	100	30	150	2.1	2.6	35.0	45			
		BL-BY274N	Green		568	White Diffused	30	100	30	150	2.2	2.6	50.0	45			
		BL-BY274N	Yellow		585	White Diffused	35	100	30	150	2.1	2.6	35.0	45			
T-1 3/4 1.0" Lead Standard 5.0	07	BL-BE204	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	40				
		BL-BE204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40				
		BL-BY204	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	30.0	40				
2.0x5.0x7.0 1.0" Lead Rectangular	07	BL-BY204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40				
		BL-BW7302B-R	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.0	80				
		BL-BW7302B-R	Green	568	Water Clear	30	100	30	150	2.2	2.6	4.5	80				


Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _f (V)	I _f =20mA	Over U'x1.2
Reverse current	I _r (uA)	V _r =5V	Over U'x2
Luminous intensity	I _v (mcd)	I _f =20mA	Below S'X0.5



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB LED模块系列 XB LED MODULE Series

MODEL : XB-SEU-01xx--xx



TOLERANCE
<=1.5mm ±0.1
>1.5mm ±0.2
>=10mm ±0.3

ANGLE TOL
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	2024-4-8	
SCALE : 7 : 1	CHK'D	DONG. PANG	DATE	2024-4-8	
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-4-8

2	TERMINAL	PBS STRIP	3	Au PLATED
1	CASE	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING