

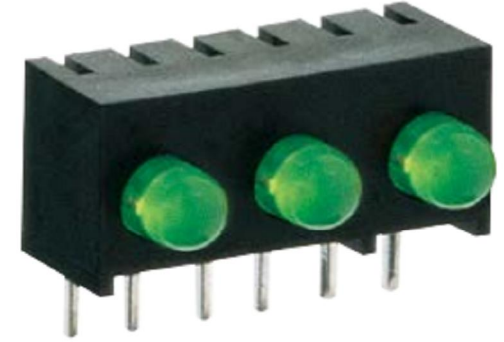
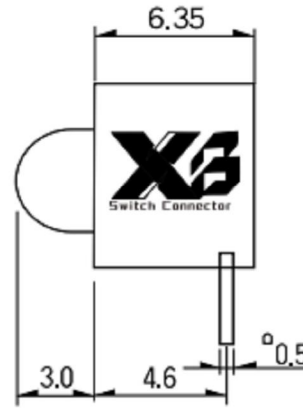



ROHS

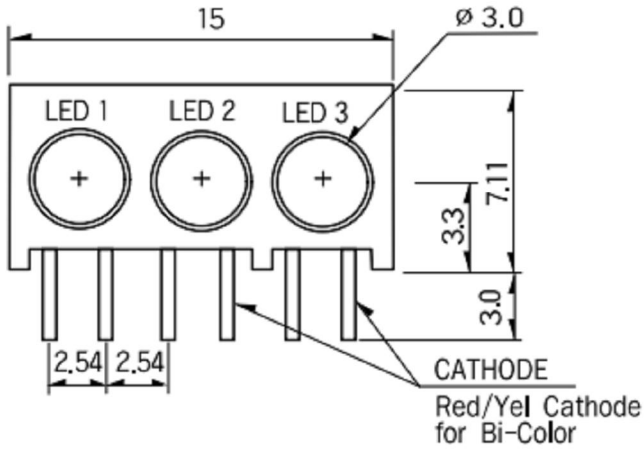

P.C.B DIMENSION

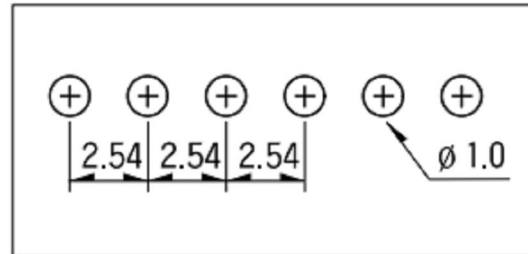

* Reverse Cathode Left : SEF-01- G
Housing Color : Gray



Number	0	1 (Bi-Color)	2	3	4 (Bi-Color)	8	9
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue	White

Package	LED TYPE	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings			Electro-optical Data (At 20mA)		Viewing Angle 2θ (1/2°)			
			Emitted Color	Peak Wavelength (nm)		ΔI (mA)	Pd (mW)	If (mA)	Vf (V)	Iv Typ. (mcd)		Iv Max. (mcd)		
High Efficiency	01	BL-B2141K	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50	
		BL-B3141K	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50	
		BL-BA1141K	Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50	
		BL-DB141K	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50	
		BL-BB41V1E	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45	
		BL-B5141K-L	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50	
	Low Current	02	BL-B2141K-L	Green	568	Green Diffused	30	16	7	-	1.0	2.3	7.0	50
			BL-B3141K-L	Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50
			BR-B4541K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	-	-	-	15.5
	Integral Resistor 5V	03	BR-B2141K-05V	Green	568	Green Diffused	-	-	8	-	-	-	15.5	-
			BR-B3141K-05V	Yellow	585	Yellow Diffused	-	-	8	-	-	-	14.0	-
			BR-B4141K-05V	Orange	635	Orange Diffused	-	-	8	-	-	-	15.5	-
			BL-BE271E	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45
	Bi-color	07	BL-BE271E	Green	568	White Diffused	30	100	30	150	2.2	2.6	30.0	45
BL-BYX271E			Green	568	White Diffused	30	100	30	150	2.2	2.6	30.0	45	
1.0" Lead Flangeless 4.82	01	BL-B5133N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40	
		BL-B2133N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	40	
		BL-B3133N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40	
		BL-B5134N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	13.0	45	
		BL-B2134N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45	
		BL-B3134N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45	
	T-1 3/4 1.0" Lead Flangeless 5.0	01	BL-BB41R4N	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45
			BL-BEG274N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	45.0	45
			BL-BYG274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
		07	BL-BYG274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	35.0	45
			BL-BYG274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
			BL-BYG274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
T-1 3/4 1.0" Lead Standard 5.0	07	BL-BEG204	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	40	
		BL-BEG204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40	
		BL-BYG204	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	30.0	40	
2.0x5.0x7.0 1.0" Lead Rectangular	07	BL-BYG204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40	
		BL-BW7302B-R	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.0	80	
			Green	568	Water Clear	30	100	30	150	2.2	2.6	4.5	80	


Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _f (V)	I _f =20mA	Over U'x1.2
Reverse current	I _r (uA)	V _r =5V	Over U'x2
Luminous intensity	I _v (mcd)	I _f =20mA	Below S'X0.5



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB LED模块系列 XB LED MODULE Series

MODEL : XB-SEF-01xxx



TOLERANCE
<=1.5mm ±0.1
>1.5mm ±0.2
>=10mm ±0.3

ANGLE TOL
±2°

NO.	TERMINAL	MATERIAL	QTY	FINISHING
2	TERMINAL	PBS STRIP	3	Au PLATED
1	CASE	PBT	1	BLACK
	PART NAME			

UNIT	MM	DWN.	ZENQ. CHEN	DATE	2024-4-8
SCALE	7 : 1	CHK'D	DONG. PANG	DATE	2024-4-8
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-4-8