

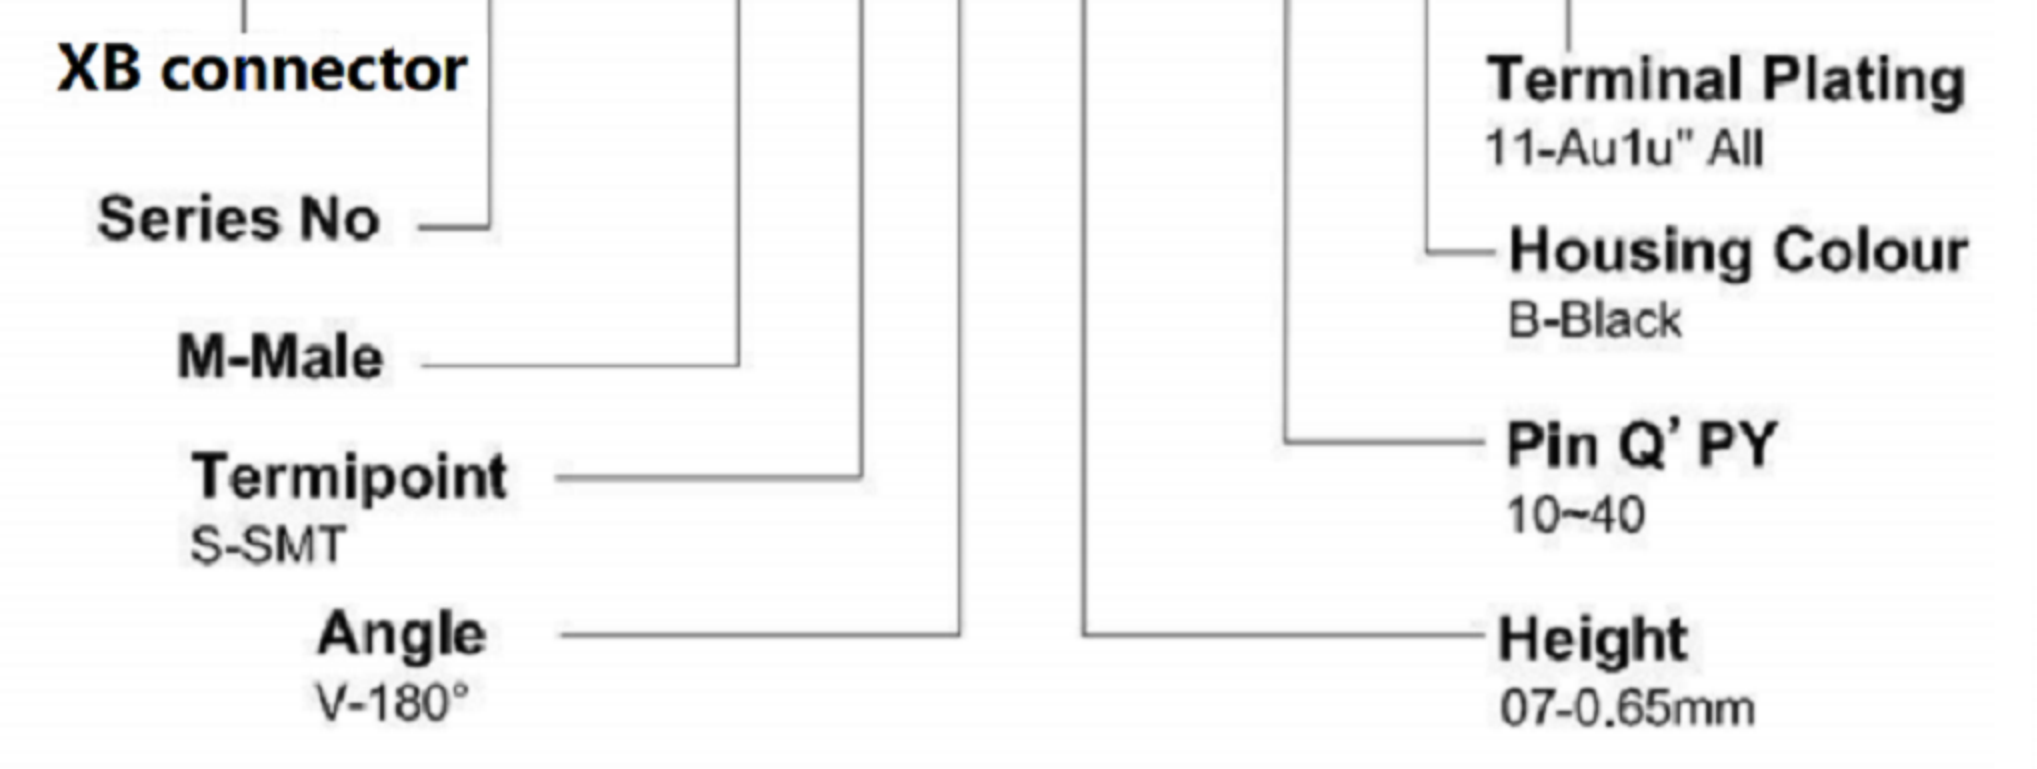


XB- 0401 M S V 07 -XX X XX 01

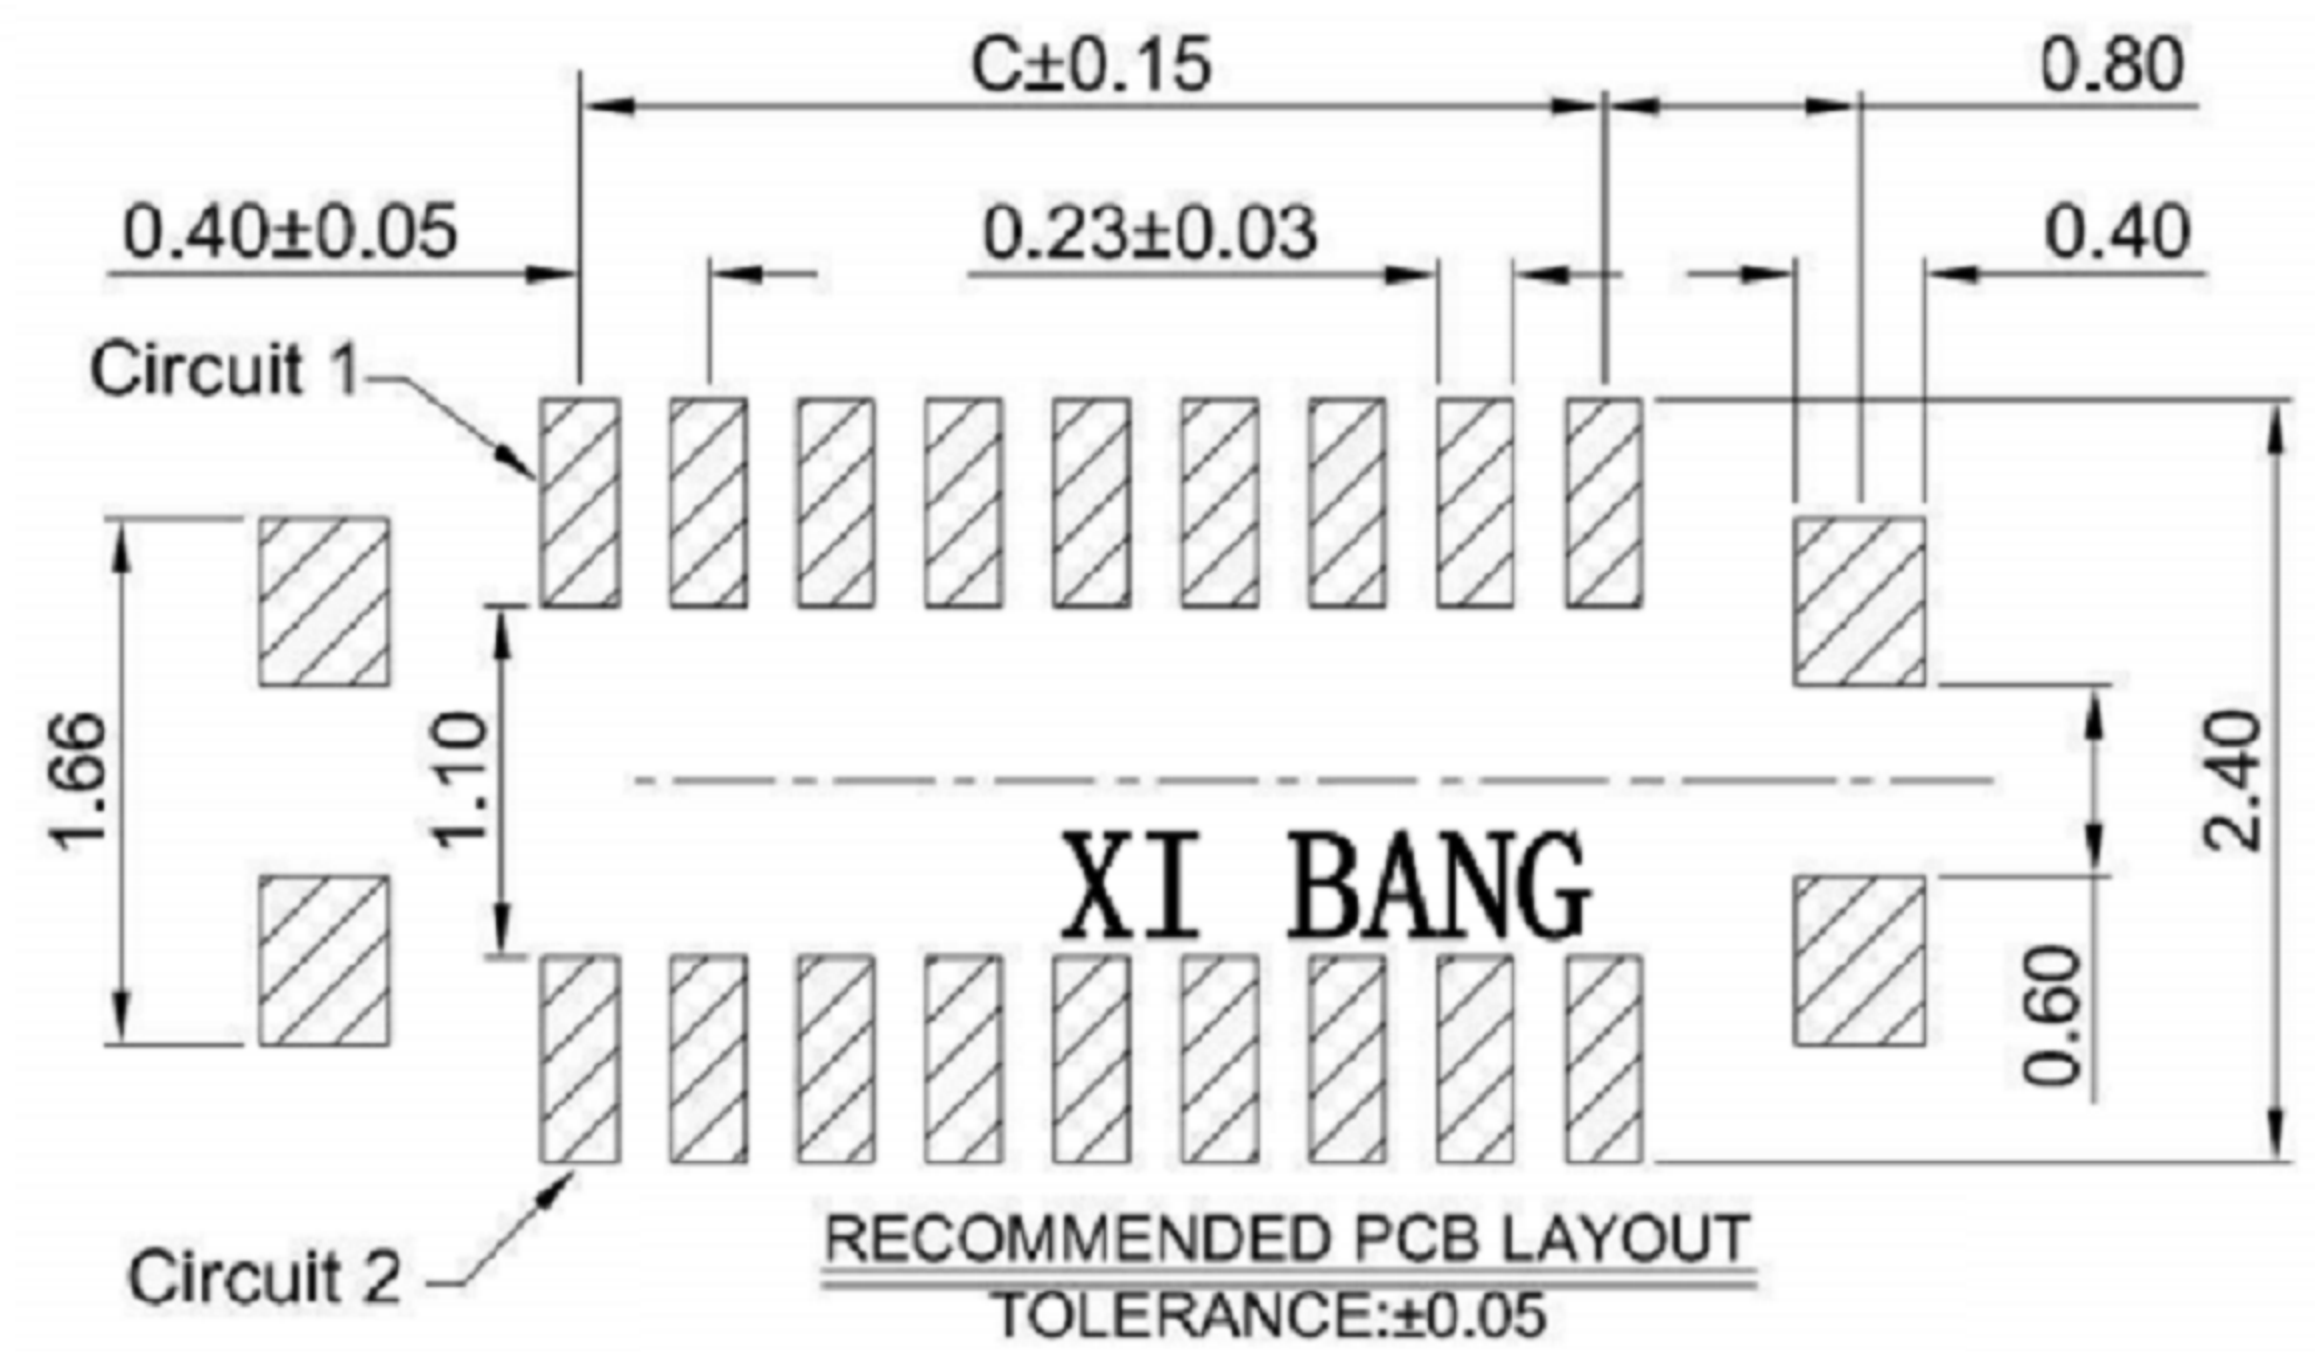

XB connector Specification:

1. Current rated: 0.3A AC/DC
2. Voltage rating: 60V AC/DC
3. Withstanding voltage: 150V AC
4. Contact resistance: 90mΩ max.
5. Insulation resistance: 1000MΩ min
6. Durability cycle: 20 Cycles
7. Removal force: 0.10kgf/Pin min
8. Operating temperature range: -35°C ~ +85°C

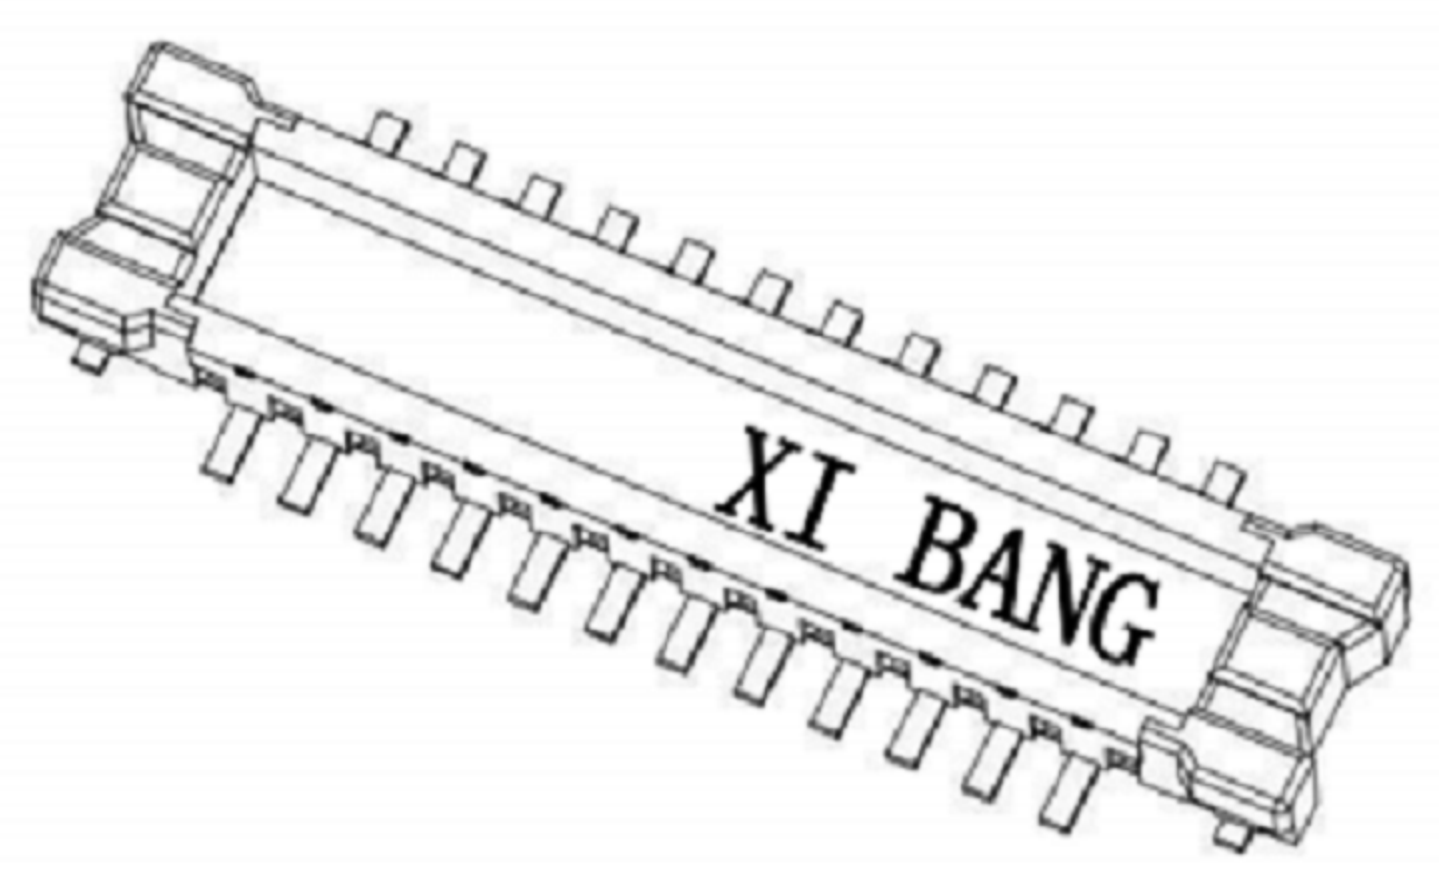

Ordering Information:

Circuit	Dimension(mm)			Circuit	Dimension(mm)		
	A	B	C		A	B	C
10	3.80	3.20	1.60	24	6.60	6.00	4.40
12	4.20	3.60	2.00	30	7.80	7.20	5.60
14	4.60	4.00	2.40	34	8.60	8.00	6.40
16	5.00	4.40	2.80	40	9.80	9.20	7.60
20	5.80	5.20	3.60	-	-	-	-

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu
DATE: 03/10/22

CHECKED BY: Jacky Chen
DATE: 03/10/22

APPROVED BY: Tony Kao
DATE: 03/10/22

MAT'L

FINISH

SCALE 1:1

SHEET NO. 1 of 1

TITLE CONNECTOR

MODLE BTB 0.40mm Pitch 180° SMT Type Male H0.70mm

DWG NO. XB-0401MSV07

PART NO.

SIZE A4
VER R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	031022