

1 2 3 4 5 6 7 8 9

F




E

D

C

B

A

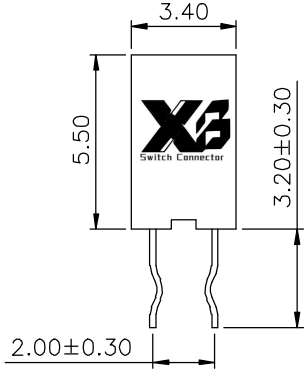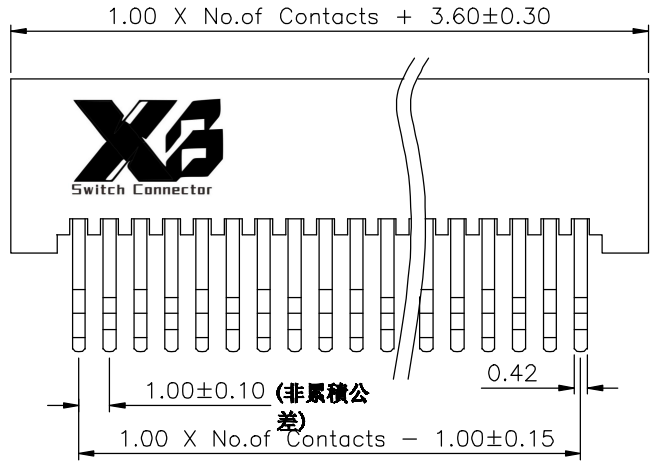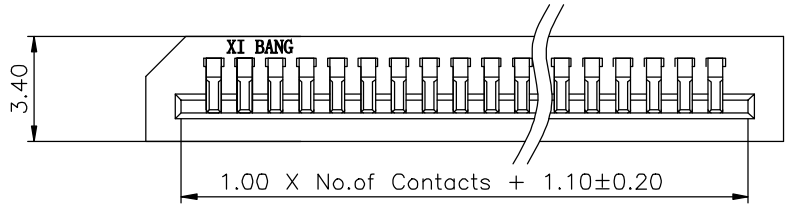

Specifications

Current Rating: 0.5Amp
 Voltage Rating: 125V/AC
 Insulation Resistance: 500M ΩMin.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 30mΩ Max.
 Operating Temperature: -25°C to +85°C


Materials

Contact Material: Phosphor Bronze
 Insulation Material: High Temperature Thermoplastic, UL 94V-0 Nylon46 or the equivalent material.
 All materials must meet **XI BANG** requirement for environment protection.


Ordering Information

XB-FPC-10-105-A003 XX XX A 003 F X A X

No. of Pins per Row 04~40
 Standard Plating 01=Tin Selective Plating 02=Gold Flash
 Color 1=Black 2=White
 Standard Packing C=Tube Selective Packing A=Box

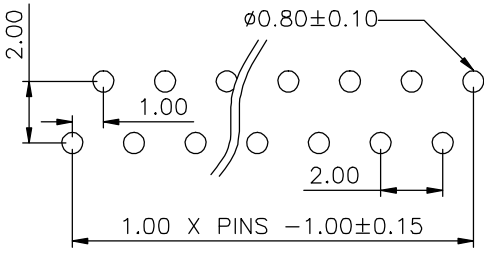

P.C.B LAYOUT

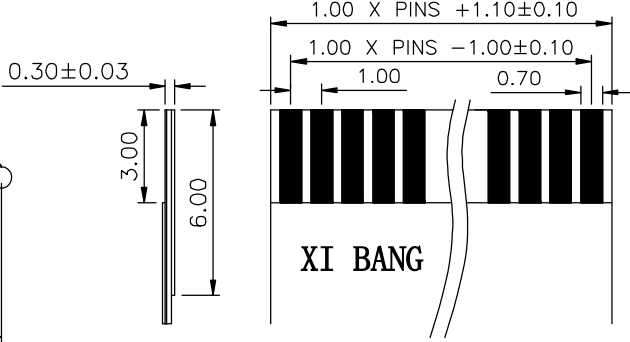

FPC Dimension Reference

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DRAWING	TITLE
XB-FPC-10-105-A003	1.00mm PITCH FPC
PART NO.	

REV. 07	UNIT. mm	SCALE. 5:1	PAGE. 1/1	
---------	----------	------------	-----------	--

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A